




Product Specification

Beck Compact Module BCM19WG1-R RGB/DVI

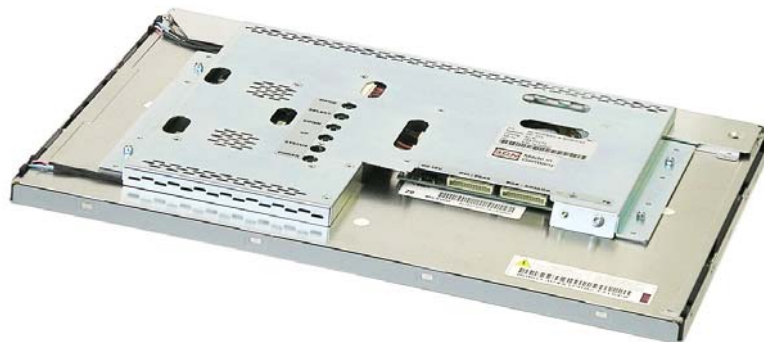

April 2010

Preliminary

The information given in this document is carefully checked and believed to be reliable. However, Beck GmbH & Co. Elektronik Bauelemente KG takes no responsibility for any failure or product damage caused by application of this information. Please check all connections carefully with the product specification.

Products of Beck Elektronik are not intended for use in systems in which failures of product could result in personal injury. All mentioned trademarks are registered trademarks of their owner.

This specification is subject to change without notification.



Table of Contents

1. Revision History	3
2. General Description	4
2.1 Product Description	4
2.2 Basic Components	4
2.3 Liability	4
3. General Features	5
4. Electrical Specification	6
4.1 Input Signal Characteristics	6
4.2 Power Supply and Supply Voltage Ripple	6
4.3 Connector Pin Assignment and Description	7
4.3.1 Signal Input Pin Assignment	7
4.3.2 Power Supply Pin Assignment	8
5. Optical Specifications	8
5.1 Optical Characteristics	8-12
5.2 Lamp Life	12
6. OSD Adjustment	12
6.1 OSD LED Operating Mode	12
6.2 Key Name and Function	13-14
6.3 Menu Structure	15-16
6.4 Window Structure	17
6.4.1 Color	17
6.4.2 Image Settings	18
6.4.3 Position	19
6.4.4 OSD Menu	20
6.4.5 Language	21
6.4.6 Misc.	22
6.4.7 Exit	23
7. Environmental and Reliability Specification	23
8. Mechanical Specifications	24
8.1 Dimensional Requirements	24-25
8.2 Antiglare and Polarizer Hardness	26
9. Handling & Cautions	26
10. Packing Information	27
11. Appendix	27
11.1 Signal Timing Chart	27
11.2 Optional Accessories	28-29



Revision	ECN NO.	Description	Date	Prepared
0		Initial Release	15.04.2010	Sönke Mohr



2. General Description

2.1 Product Description

The Beck Compact Module BCM19WG1-R consists of a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching device. This module has a 48.3 cm (19.0 inch) diagonally measured active area with WXGA+ resolutions (1440 horizontal by 900 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripes. This module can display 16,7M colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

The Beck Compact Module BCM19WG1-R is no complete monitor but a component. Drive peripherals as interface card, backlight inverter, OSD-board, etc. are adapted to the display by a metal covering. The components are tested and tuned to work together perfectly.

2.2 Basic Components

The BCM19WG1-R consists of:

Item	Description	Manufacturer
48,3 cm (19.0") Active Matrix TFT LCD	HT190WG1-600	BOE OT
Interface-Controller	DCMR-30WX+B190	Uplusvision
Backlight Inverter	FIF1942-58C	Frontek
OSD-Board	EPAS-OSD1 SMD LED	Uplusvision

2.3 Liability

Beck Elektronik is not responsible for changes of the components of the Beck Compact Module. This specification is subject to change without notification.

This specification refers to the specifications of the manufacturers of the parts.

If required, Beck Elektronik will send the full specification of the included components.



3. General Features

Item	Description	Remarks
Diagonal	48.3 (19.0")	cm
Active area	408.24 (H) x 255.15 (V)	mm
Resolution – display	1440 x 900	pixel
Resolution – controller	640 x 480 – 1440 x 900	pixel
Pixel pitch	0.2835 (H) x 0.2835 (V)	mm
Pixel arrangement	RGB vertical stripe	
Display colors	16,7 Mio.	colors
Display mode	Normally White	
Brightness	300	cd/m ²
Contrast ratio	1000:1	
Viewing angle	hor.: 85° / 85°, ver.: 80° / 80°	deg.
Response time	5	msec
Interface	Analog-RGB H-Sync. / V-Sync. // DVI	
H-Sync.	31.4 – 80	KHz
V-Sync.	60 – 75	Hz
Power input voltage	12	V DC
Power consumption	40	W
Dimension	428.0 x 278.0 x 28.0	mm
Weight	2,680	gram
RoHS compliance	Yes	



4. Electrical Specification

4.1 Input Signal Characteristics

Description	Signal	Unit	Min	Typical	Max	Notes
RGB Input	Analog RGB	• Vp-p	0	-	0.7	
	Sync	• Vdc	0	-	5.5	
	Horizontal Frequency	• KHz	31.4	-	80	
	Vertical Frequency	• Hz	60	-	75	
DVI Input	Differential Output	• mVp-p	150	-	1200	
	Input clock Frequency	• MHz	25.2	-	136.8	

4.2 Power Supply and Supply Voltage Ripple

Input Signal	Description	Unit	Min	Typical	Max	Remarks
DC Input	DC Voltage	Vdc	11.4	12	12.6	
	Power Consumption	Watts	-	40	-	

- Supply ripple voltage: 100mV



4.3 Connector Pin Assignment and Description

4.3.1 Signal Input Pin Assignment

Analog-RGB Input Connector

Signal Connector: S13B-PH-SM3-TB (JST)

Group	Pin No.	Symbol	Description
Analog RGB	1	HSYNC	Horizontal Sync
	2	GND	Ground
	3	VSYNC	Vertical Sync
	4		N.C.
	5	BLUE	Blue
	6	BLUE GND	Analog Ground Blue
	7	GREEN	Green
	8	GREEN GND	Analog Ground Green
	9	RED	Red
	10	RED GND	Analog Ground Red
	11	DDC CLK	DDC Clock
	12	DDC DATA	DDC Data
	13	DET VGA	Detect VGA

DVI Input Connector

Signal Connector: S13B-PH-SM3-TB (JST)

Group	Pin No.	Symbol	Description
DVI	1	SDA	DDC Data
	2	SCL	DDC Data Clock
	3	RX2+	DVI Data 2+
	4	RX2-	DVI Data 2-
	5	GND	Ground
	6	RX1+	DVI Data 1+
	7	RX1-	DVI Data 1-
	8	GND	Ground
	9	RX0+	DVI Data 0+
	10	RX0-	DVI Data 0-
	11	GND	Ground
	12	RXC+	DVI Clock+
	13	RXC-	DVI Clock-



4.3.2 Power Supply Pin Assignment

Power Input Connector

Type: 40006WR-02 (YEONHO)

Pin No.	Symbol	Description	Note
1	GND	Ground	
2	+12 V	12V DC	

5. Optical Specifications

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{\Phi=0} (= \theta_3)$ as the 3 o'clock direction (the "right"), $\theta_{\Phi=90} (= \theta_{12})$ as the 12 o'clock direction ("upward"), $\theta_{\Phi=180} (= \theta_9)$ as the 9 o'clock direction ("left") and $\theta_{\Phi=270} (= \theta_6)$ as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 5.0V +/- 10% at 25°C .



5.1 Optical Characteristics

[VDD=5.0V, Frame rate=60Hz, Clock=54MHz, I_{BL}= 7.5mA, Ta = 25±2°C]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remarks
Viewing Angle	Horizontal	Θ_3	CR > 10	70	85	-	Deg	Note 1
		Θ_9		70	85	-	Deg	
	Vertical	Θ_{12}		70	80	-	Deg	
		Θ_6		70	80	-	Deg	
	Horizontal	Θ_3	CR > 5	85	-	-	Deg	
		Θ_9		85	-	-	Deg	
	Vertical	Θ_{12}		85	-	-	Deg	
		Θ_6		85	-	-	Deg	
Luminance contrast ratio		CR	$\Theta = 0$ (Center) Normal Viewing Angle	700	1000	-		Note 2
Luminance of white		Y_W		250	300	-	cd/m ²	Note 3
White luminance uniformity		ΔY		75	80	-	%	Note 4
Reproduction of color	White	W_x		0.283	0.313	0.343		Note 5
		W_y		0.299	0.329	0.359		
	Red	R_x		0.614	0.644	0.674		
		R_y		0.306	0.336	0.366		
	Green	G_x		0.255	0.285	0.315		
		G_y		0.563	0.593	0.623		
	Blue	B_x		0.111	0.141	0.171		
		B_y		0.046	0.076	0.106		
Response time		T_r			5	8		Note 6
		T_d						
Cross talk		CT			-	-	2.0	%


Notes:

- Viewing angle ins the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
- Contrast measurements shall be made at viewing angle of θ= 0° and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$




Figure 1: Measurement set up

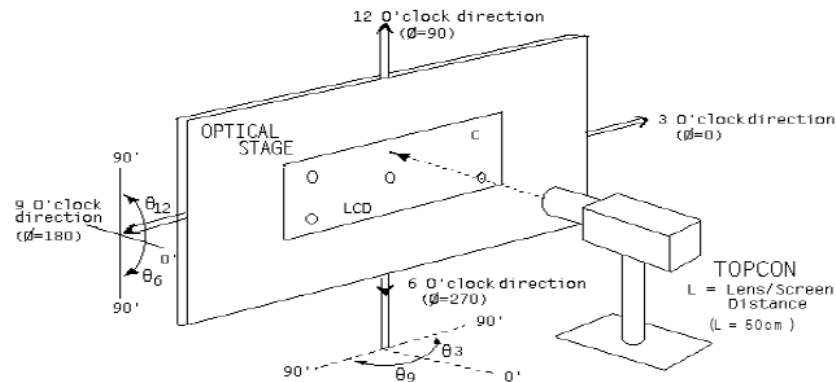

- Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


Figure 2: White Luminance and Uniformity Measurement Locations (9 points)

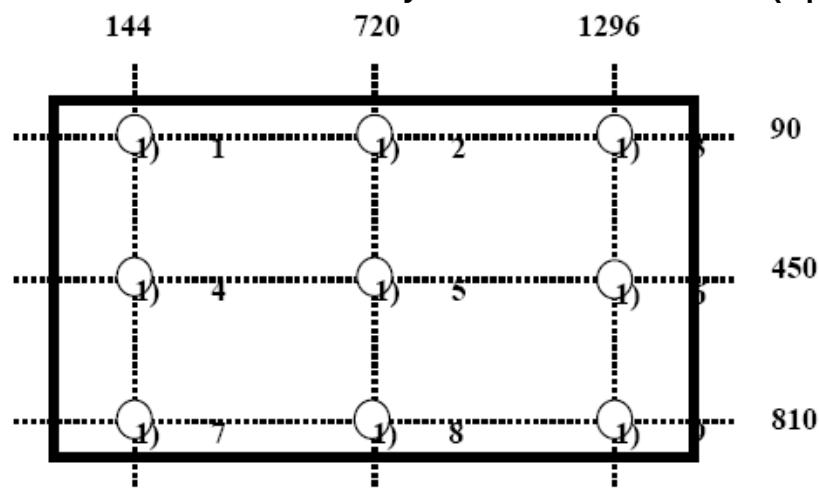

- The White luminance uniformity on LCD surface is then expressed as:
 $\Delta Y = (\text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points})$
 (See FIGURE 2).
- The color chromaticity coordinates shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- The electro-optical response time measurements shall be made as FIGURE 3 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td, and 90% to 10% is Tr.




Figure 3: Response Time Testing

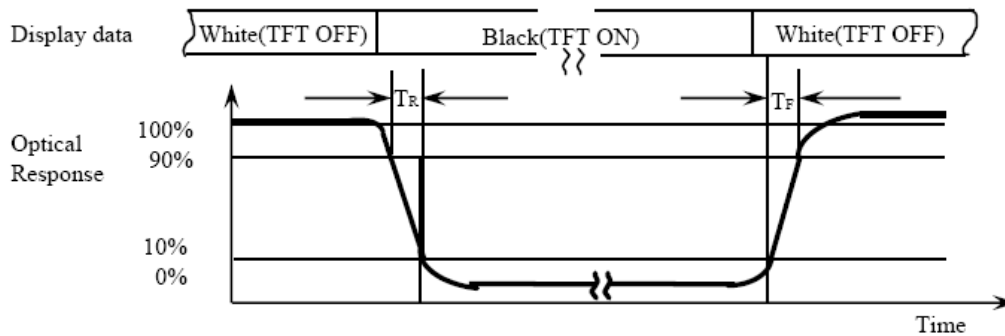

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4).

Figure 4: Cross Modulation Test Description

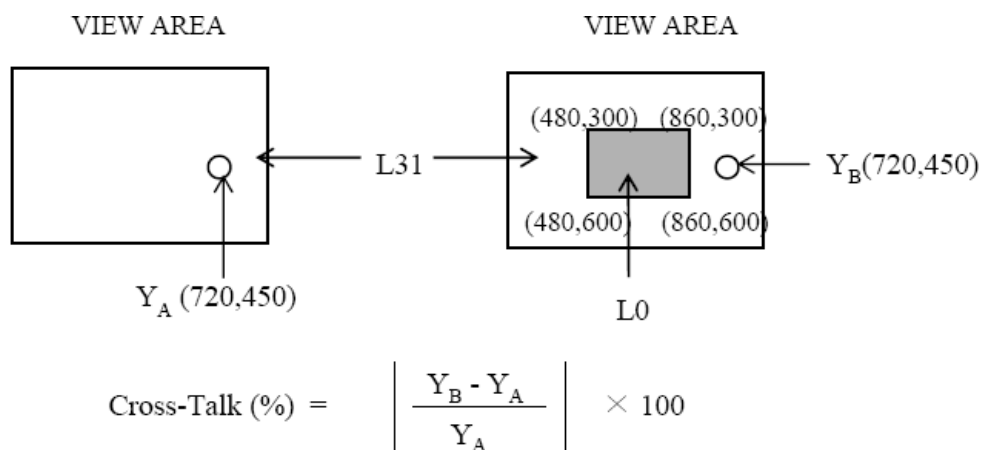

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns.



5.2 Lamp Life

Parameter	Min	Typ	Max	Unit	Remarks
Lamp Life	40.000	50.000		hrs	$I_{BL} = 6.5 \text{ mA}$

6. OSD Adjustment

The Beck Compact Module BCM19WG1-R gives a various and very easy graphics interface to its users. Users have easy access to the functions that they want to adjust. Be sure that your system's power and LED are turned on before the OSD controls are being used.

6.1 OSD LED Operating Mode

Power	Signal Input	LED (Red)	LED (Green)
On	Plugged	Off	On
Off	Plugged	Off	Off
On	Unplugged	On	On
Off	Unplugged	Off	Off



6.2 Key Name and Function

No.	Button name	Switch Function
1	Menu	1. First click : Appears the OSD main menu 2. Second click : Exit sub & main menu
2	Select	HOT KEY FOR INPUT SIGNAL SELECTION 1. Select main & sub menu function 2. Confirmation button for selected menu points 3. Back to the sub menu
3	Up(Right)	1. Move up/right main & sub menu 2. Increase selected value
4	Down(Left)	HOT KEY FOR AUTO ADJUSTMENT 1. Move down/left main & sub menu 2. Decrease selected value
SMD-LED	Status	look at 6.1 OSD LED Operating Mode
5	Power	1. Turns ON/OFF the system

Accessing the menu system:

1. With the OSD off, push the **Menu** button to activate the main OSD menu.
2. Use the **Up** and **Down** buttons to move through the main menu. To select a desired sub menu, press the **Select** button after your selection. The selection tabs are highlighted.
3. After selecting sub menu use the **Up** and **Down** buttons to move through the sub menu. To select a setting icon, press the **Select** button after your selection. The selected icons are highlighted.
4. There are two types of icons: some have a single function and must be confirmed with the **Select** button, the other options are setting bars. Once a setting bar appears, it can be increased or decreased via the **Up** and **Down** buttons. The setting bar moves and the numeric value indicator changes to reflect your adjustments.
Note: The numeric value indicator is provided as a point of reference only and has nothing to do with a real measurement.



5. There are different ways to close the OSD menu:

- (a) Waiting some seconds (**timeout**). This time can be adjusted as needed in the sub menu OSD-Menu → OSD-Timer.
- (b) After an auto adjustment and confirmation the OSD menu closes automatically.
- (c) After a factory reset and confirmation the OSD menu closes automatically.
- (d) In the sub menu: Press the **Menu** button two times to leave the sub menu.
- (e) In the main menu: Press the **Menu** button to leave the OSD menu.
- (f) After adjusting a setting, press the **Select** or **Menu** button. Now your selected sub menu is highlighted. Confirm your selection with the **Menu** button to leave the sub menu. This highlights your menu selection in the main menu. Confirm again with the **Menu** button to leave the OSD menu.

6. Auto Adjustment without opening OSD menu:

- Press the **Down** button and an auto adjustment will be done automatically.

7. Input signal selection without opening OSD menu:

- Press the **Select** button and a signal selection will be done automatically.

8. Booting with different input signals

If you boot the BCM device with RGB and DVI parallel, it is possible to change between both input signals. If you boot the BCM device either with RGB or DVI, there will be an automatically signal input detection. Not connected signal inputs won't be recognized. The BCM device identify the connected signal input, otherwise it will go into a sleeping mode. Furthermore, the BCM device search the last input signal, this is recognized as the prior input.

9. Storing of Display settings

If you disconnect the power supply or signal cable, all your previous display settings e.g. brightness, contrast, clock, phase etc. will be stored.

REMARK:


If you use the BCM device with different resolutions, it is necessary to do an auto adjustment in all your operating modes. The different resolution will be stored as well. If you change your operating mode between the different resolutions, the image will be automatically 100% central adjusted.


10. Reset procedure

If you want to have a factory reset, so you have to precede a reset in your entire operating mode. Please do at first a reset on DVI-Side and after that a reset on RGB side. Right after doing it, there should be a message on the screen: "INITIALIZE"/"Auto Adjust..".



6.3 Menu Structure

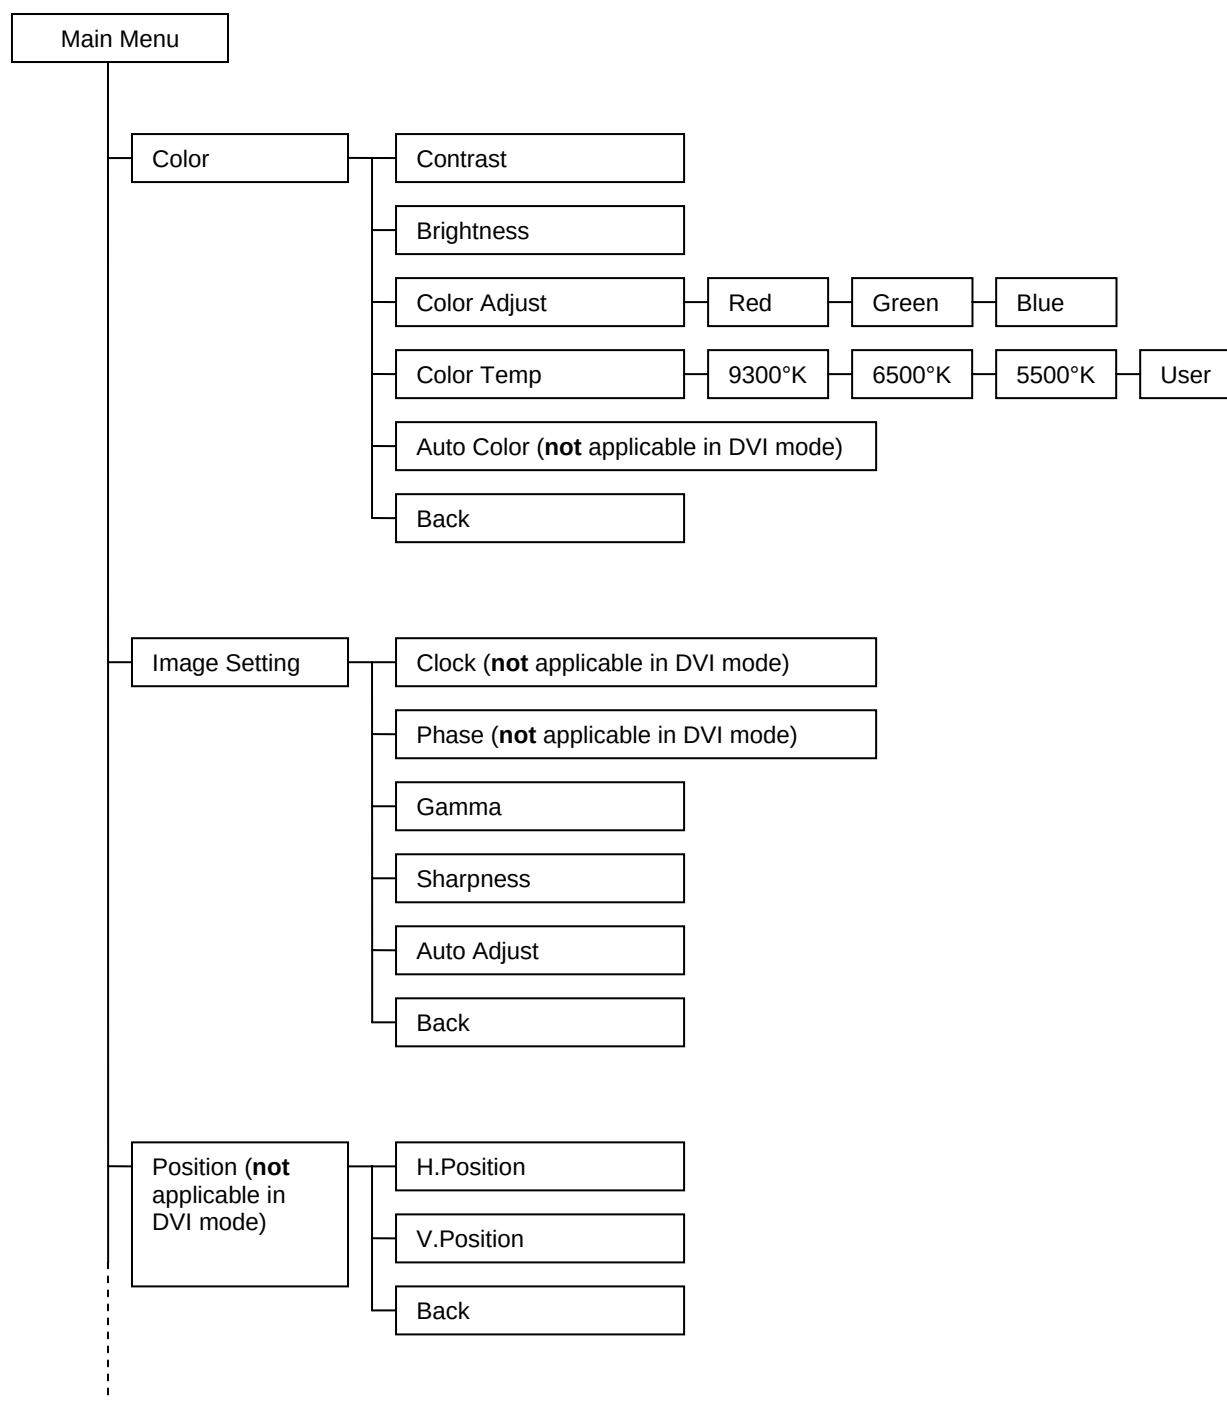

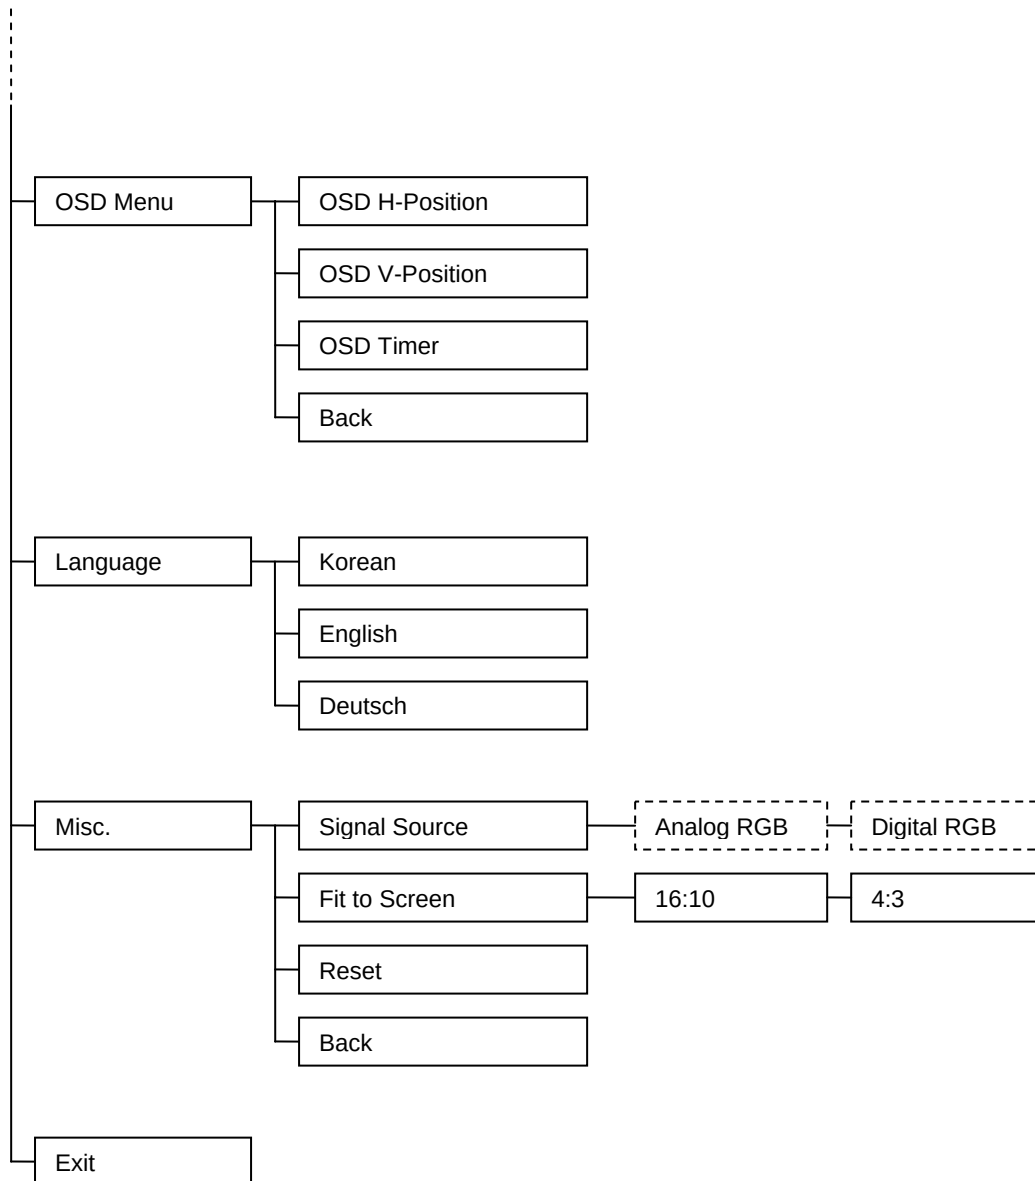





6.4 Window Structure

6.4.1 Color

Main Menu

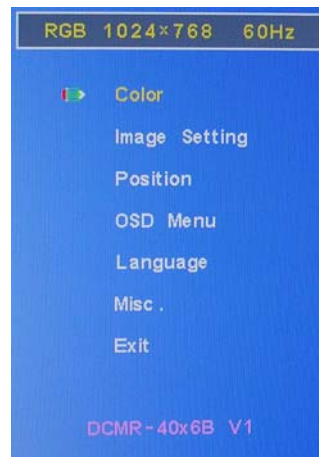

Sub Menu "Color"

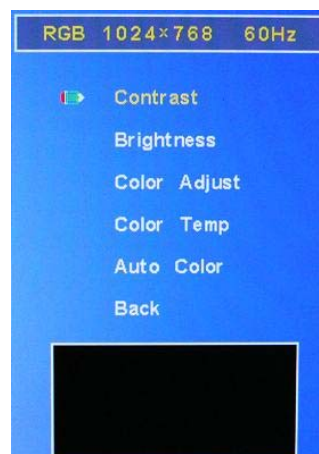


- **Contrast:** Adjusts image contrast.
- **Brightness:** Adjusts displays brightness. Brightness will be regulated using the connected inverter.
- **Color Adjust:** Adjusts image color.
 - **USER:**
 - **RED:** Adjusts red color.
 - **GREEN:** Adjusts green color.
 - **BLUE:** Adjusts blue color.
- **Color Temp.:** Selects different color temperatures (9300°K / 6500°K / 5800°K / USER)
- **Auto color (not applicable in DVI mode):** Adjusts image color automatically.
- **Back:** You will leave the sub menu back to main menu **OR** press menu button and you will leave the sub menu back to main menu.




6.4.2 Image Setting

Main Menu

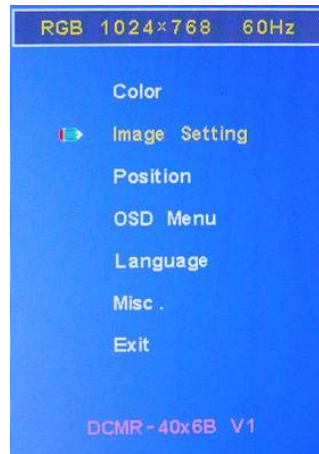

Sub Menu "Image Setting"

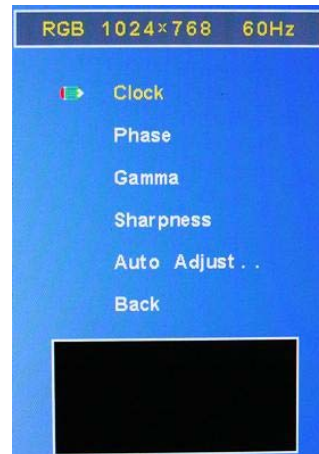


- **Clock** (**not** applicable in DVI mode): Adjusts clocks per line (maximum length of line).
- **Phase** (**not** applicable in DVI mode): Adjusts image phase.
- **Gamma**: Adjusts image gamma level.
- **Sharpness**: Adjusts image sharpness.
- **Auto Adjust**: Optimizes the displayed image. Adjusts phase and image position automatically (Message on the screen: "Auto Adjust..").
- **Back**: You will leave the sub menu back to main menu **OR** press menu button and you will leave the sub menu back to main menu.




6.4.3 Position

Main Menu

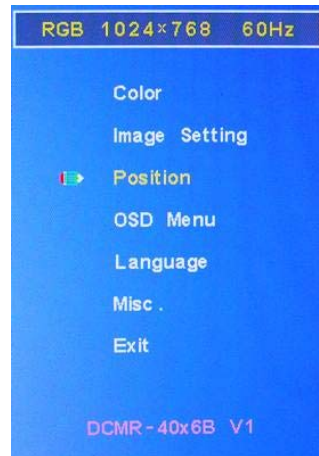

Sub Menu "Position"

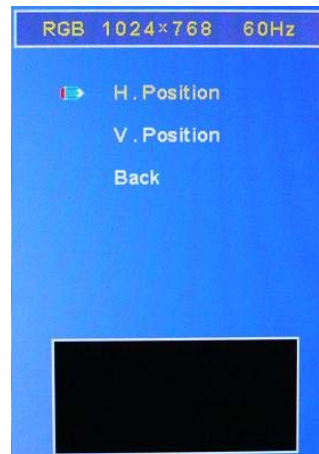

- **H.Position:** Adjusts horizontal image position.
- **V.Position:** Adjusts vertical image position.
- **Back:** You will leave the sub menu back to main menu **OR** press menu button and you will leave the sub menu back to main menu.




6.4.4 OSD Menu

Main Menu



Sub Menu "OSD Menu"

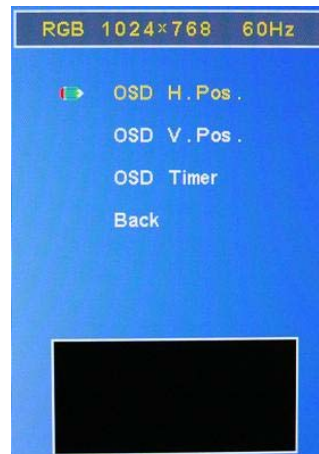


- **OSD Horizontal Position:** Adjusts OSD position horizontally.
- **OSD Vertical Position:** Adjusts OSD position vertically.
- **OSD Timer:** The OSD vanishes after a certain time of inactivity. Values of 5-20s are possible.
- **Back:** You will leave the sub menu back to main menu **OR** press menu button and you will leave the sub menu back to main menu.



6.4.5. Language

Main Menu

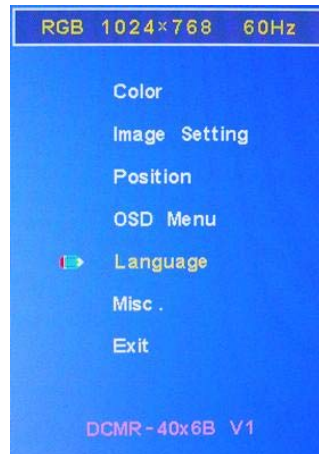

Sub Menu "Language"




- **Language:** Selects your adequate language (Korean, English, Deutsch).



6.4.6 Misc.

Main Menu

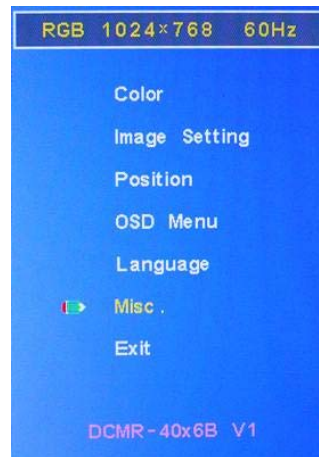

Sub Menu "Misc."




- **Signal Source:** Selects different input signals (either Analog RGB or Digital RGB)
- **Fit to screen:** Selects different aspect ratios (either 16:10 or 4:3)
- **Reset:** Restores factory settings (Message on the screen: "INITIALIZE") – **PLEASE FOLLOW THE ADVICE ON PAGE 14 Point 10 "Reset procedure".**
- **Back:** You will leave the sub menu back to main menu **OR** press menu button and you will leave the sub menu back to main menu.



6.4.7 Exit

Main Menu

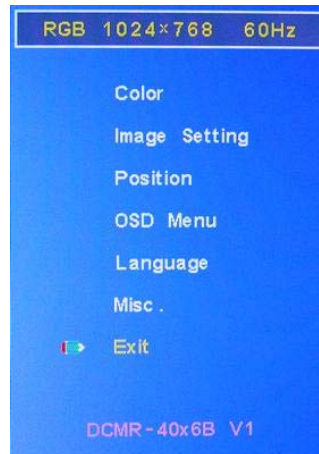

- **Exit:** Leaves the OSD-Menu

7. Environmental and Reliability Specification

The Reliability items and its conditions are shown in below.

No.	Items	Conditions	Note
1	Temperature (operating)	TBD	1
2	Temperature (non-operating)	-20 °C – 60 °C	
3	Humidity (operating)	80% RH	
4	Vibration test (non operating)	Gravity / AMP: 1.5G Frequency: 10 – 300 Hz Sweep: 30 minutes each Axis (X-Y-Z)	
5	Shock test (non operating)	Gravity: 50G Wave: sine Active time: 11ms Direction: ±X, ±Y, ±Z (one time for each axis)	
6	Electro-static discharge test (non-operating)	Air: 150pF, 330Ω, 15KV Contact: 150pF, 330Ω, 8KV	
7	Thermal shock test (TST)	-20°C ↔ 60°C (0.5 hr), 100cycles	

Note:

1. It is the user responsibility to keep this temperature within the above specification.



- The Beck Compact Module is no independent final product. Therefore Beck Elektronik is not obliged to fulfil directives of EC Declaration of Conformity.
- The customer is responsible for certification of the end device.

8. Mechanical Specifications

8.1 Dimensional Requirements


Figure 1 shows mechanical outlines for the model BCM19WG1-R. Other parameters are shown in the below-mentioned table.

Dimensional Parameters

Parameter	Specification	Unit
Dimensional outline Horizontal Vertical Thickness	428.0 +/- 0.5 278.0 +/- 0.5 28.0 +/- 0.5	mm
Weight	2,680	gram
Active Area	408.24 (H) x 255.15 (V)	mm
Pixel pitch	0.2835 (H) x 0.2835 (V)	mm
Number of pixels	1440 (H) x 900 (V) (1 pixel = R+G+B dot)	pixel
Back light	Top / Bottom edge side 4-CCFL type	



Figure 1: Mechanical Outlines

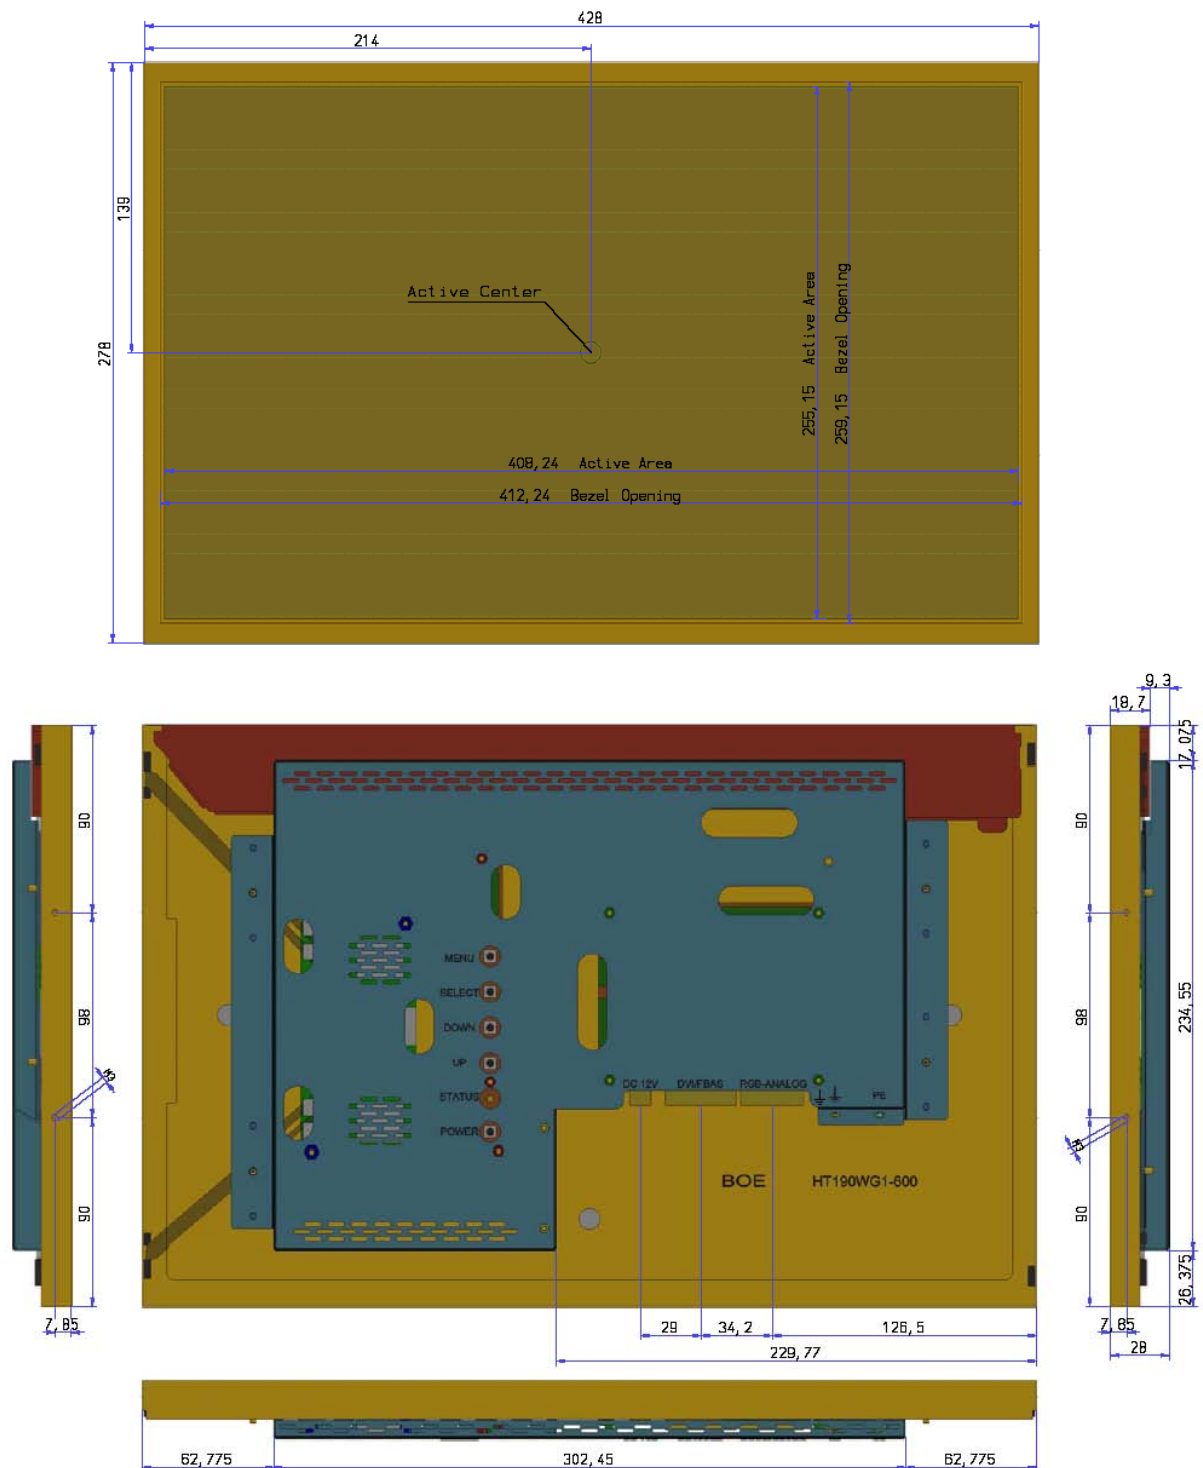



8.2 Anti-Glare and Polarizer Hardness

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

9. Handling & Cautions

Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry-cloth without chemicals for cleaning.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

Cautions for the atmosphere

- Dewdrop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended.

Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at aging time.
- Applying fixed pattern for a long time may cause image sticking.

Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc, please pack the module not to be broken. We recommend on using the original shipping packages.

REMARK:

We recommend the using of shielding possibility of VGA cable to avoid any interference. Please mount the VGA cable shield on the showing position on the backside of BCM to serve this particular purpose.



We recommend the grounding of Beck Compact Module with your device. For this purpose, there is a PE connection point placed on the back side of the module.



10. Packing Information

Each of the five BCM19WG1-R is packed into an anti-static foil.
These five units of BCM19WG1-R are packed into a carton filled and cushioned with shock absorbing styrofoam and therefore very good protected for shipping.

11. Appendix

11.1 Signal Timing Chart Analog RGB / DVI

Standard	Resolution	Refresh	f_{HSYNC}	Pixel Rate
		Rate (Hz)	(KHz)	(MHz)
VGA	640 x 350	70	31.4	25.2
	720 x 400	70	31.4	28.3
	640 x 480	60	31.5	25.2
		70	35.0	28.6
		72	37.8	31.5
		75	37.5	31.5
SVGA	800 x 600	60	37.9	40.0
		70	43.8	45.5
		72	48.1	50.0
		75	46.9	49.5
XGA	1024 x 768	60	48.4	65.0
		70	56.5	75.0
		72	57.7	75.2
		75	60.0	78.8
SXGA	1280 x 1024	60	64.0	108.0
		70	74.4	124.9
		72	77.9	134.6
		75	80.0	135.0
UXGA (only RGB)	1600 x 1200	60	74.5	162.0
WXGA	1280 x 800	60	49.6	83.5
WXGA	1360 x 768	60	47.0	85.0
WXGA+	1440 x 900	60	55.9	106.5



11.2 Optional Accessories

Connection Cable Kit –VGA 2.0m

- 2.0m VGA-cable /
PHR-13 on 15 pin HD D-SUB male connector
- 0.85m Power cable /
2 pin flat connector on 2.5 x 5.5 hollow connector



Connection Cable Kit – DVI 2.0m

- 2.0m DVI-cable /
PHR-13 on DVI-D 24+1 pin standard male connector
- 0.85m Power cable /
2 pin flat connector on 2.5 x 5.5 hollow connector



Adapter Unit RGB/DVI

- PHR-13 on 15 pin HD D-SUB female connector
- PHR-13 on DVI-D 24+1 pin standard female connector
- 2 pin flat connector on 2.5 x 5.5 hollow connector
- Mounted on adapter, prepared for BCM



Adapter Unit RGB

- PHR-13 on 15 pin HD D-SUB female connector
- 2 pin flat connector on 2.5 x 5.5 hollow connector
- Mounted on adapter, prepared for BCM



Adapter Unit DVI

- PHR-13 on DVI-D 24+1 pin standard female connector
- 2 pin flat connector on 2.5 x 5.5 hollow connector
- Mounted on adapter, prepared for BCM





Desk Power Supply 60W

Input	230V AC
Output	12V DC / 5A
Dimension	108 x 65 x 31 mm
Certificates	TÜV, CE, UL

