

# Single-Port 10/100/1000Mbps 802.3bt PoE Injector (60 Watts)



## Advanced 802.3bt Ultra PoE Network Solution

PLANET POE-171A-60 is a **Single-Port, 802.3bt Power over Ethernet Injector** with a maximum of up to **60 watts** of power output over Ethernet cables.



It is designed specifically to meet the demand for growing higher power required network equipment such as:

- ▶ **PTZ speed dome**
- ▶ **AIO (All-in-One) touch PC**
- ▶ Remote **digital signage** display
- ▶ Other network devices that need higher power to work normally



The POE-171A-60 delivers the Ethernet digital data with 54V DC power over the twisted-pair cables as a 60-watt Power over Ethernet Injector, and the connected ultra Power over Ethernet splitter, the POE-172S, will separate the digital data and the power into three optional outputs (**12V/19V/24V DC**) with distance up to 100 meters.

## Interface

- 2 RJ45 interfaces
- 1-port **Data + Power** output
- 1-port **Data input**
- 1 DC 52~56V input power socket
- 1 PoE mode (standard/legacy) DIP switch

## Power over Ethernet

- Complies with IEEE 802.3af/at/bt PoE end-span/mid-span PSE
- Supports PoE power up to 60 watts for PoE port
- Auto-detection of PoE IEEE 802.3af/at/bt equipment and devices from being damaged by incorrect installation
- Monitor the status of the total PoE usage in real time
- Remote power feeding up to 100m

## Hardware

- All-in-one compact size design
- LED indicators for Power LED, PoE-in-Use LED, Legacy LED and PoE Usage LED
- Wall-mount design
- Metal case

*Intelligent LED Indicator for PoE Mode and Real-time PoE Usage*


The POE-171A-60 was built in Legacy mode to provide the power to those PD devices that do not fully follow the IEEE 802.3af/at/bt standard. Moreover, the POE-171A-60 helps users to monitor the current status of PoE power usage easily and efficiently via its advanced LED indication. "PoE Power Usage" displayed on the front panel of the POE-171A-60 has three LED indicators of different power usages. Via the power usage LED, the POE-171A-60 enables the administrator to monitor the status of the power usage of the connected PDs in real time.

**PoE Power Usage Display**



*60 watts of Power over 4-pair UTP*

The POE-171A-60 and POE-172S Ultra PoE solutions use the same cabling standard such as IEEE 802.3af/at PoE. Instead of delivering power over 2-pair twisted UTP – be it end-span (Pins 1, 2, 3 and 6) or mid-span (Pins 4, 5, 7 and 8), it provides the capability to source up to 60 watts of power by using all the four pairs of standard Cat. 5e/Cat. 6 Ethernet cabling. In the new 4-pair system, two PSE controllers will be used to power both the data pairs and the spare pairs.

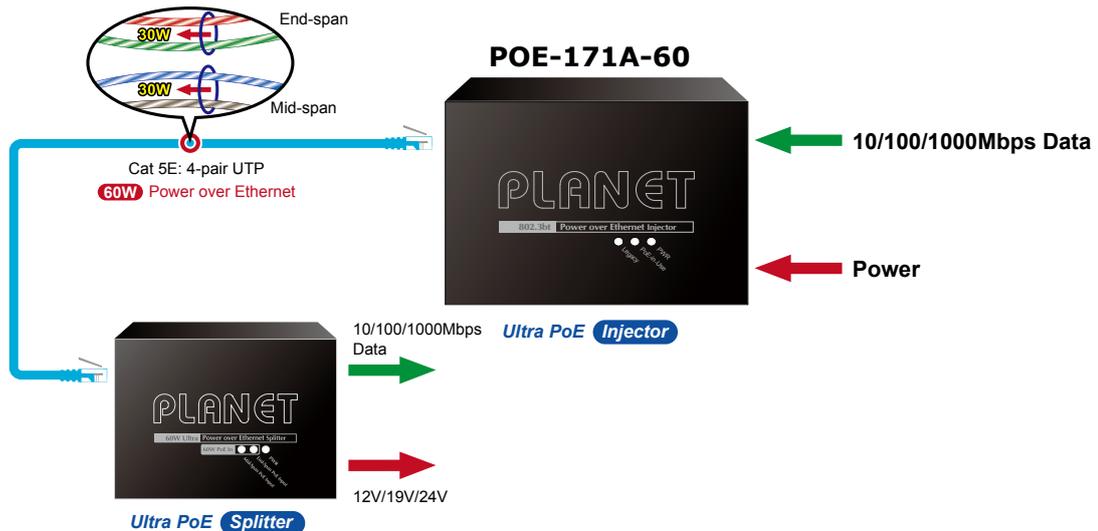


PoE Standard	IEEE 802.3af (802.3at Type 1)	IEEE 802.3at (802.3at Type 2)	IEEE 802.3bt (POE-171A-60)
Maximum Power delivered by PSE	15.4 watts	30 watts	60 watts
Power Available at PD	12.95 watts	25.5 watts	50 watts
Voltage Range	48V	50~57V	50~57V
Twisted-pair Used	2-pair		4-pair
Supported Modes	End-span or Mid-span		End-span + Mid-span
Supported Cabling	Cat. 3/5/5e/6		Cat. 5e/6

*All-in-One and Compact Size Design*

It is easy to install the PoE injector by way of **Plug and Play** and comes with simple troubleshooting, making it easy for business and home users to own it. Besides, the POE-171A-60 comes in compact housing, and provides one 52~56V DC input power jacket, one power LED, PoE-in-use LED and legacy LED. Two RJ45 ports – Ethernet port and Ethernet + DC port – are on the side panel. Simply plug in the Ethernet cables and DC power cord, and the POE-171A-60 is ready to provide high-speed network communication and the 802.3bt PoE injector functions simultaneously with no need of software configuration.

*Quick and Easy Cabling Installation for PoE Network Deployment*


Backward compatible with both 802.3af/at PoE standards, the POE-171A-60 allows users to flexibly deploy standard and high powered devices to transfer data and power simultaneously through one Ethernet cable for up to 100 meters. The POE-171A-60 frees the security IP camera and wireless AP deployment from restrictions of power outlet locations and the additional AC wiring. It thus reduces cables and eliminates the need for electrical outlets on the wall, ceiling or any unreachable place, and most of all, it reduces installation time.

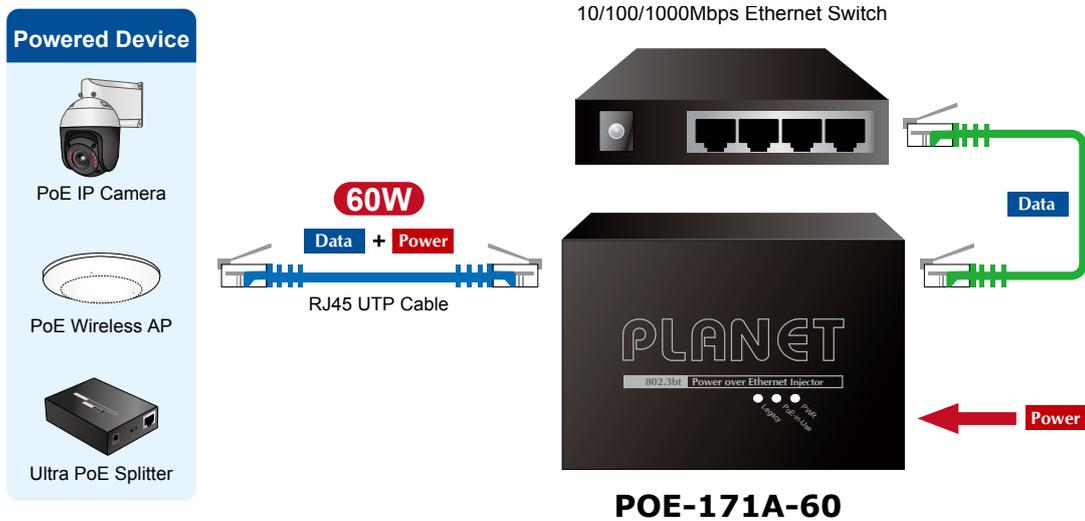

## Applications


*Installation of 802.3bt PoE Injector*

Due to the backward capability of IEEE 802.3af/at PoE standard, the POE-171A-60 can directly connect with any IEEE 802.3af/at end-nodes, such as PTZ (Pan, Tilt & Zoom) speed dome network cameras, color touch-screen Voice over IP (VoIP) telephones, and multi-channel wireless LAN access points.

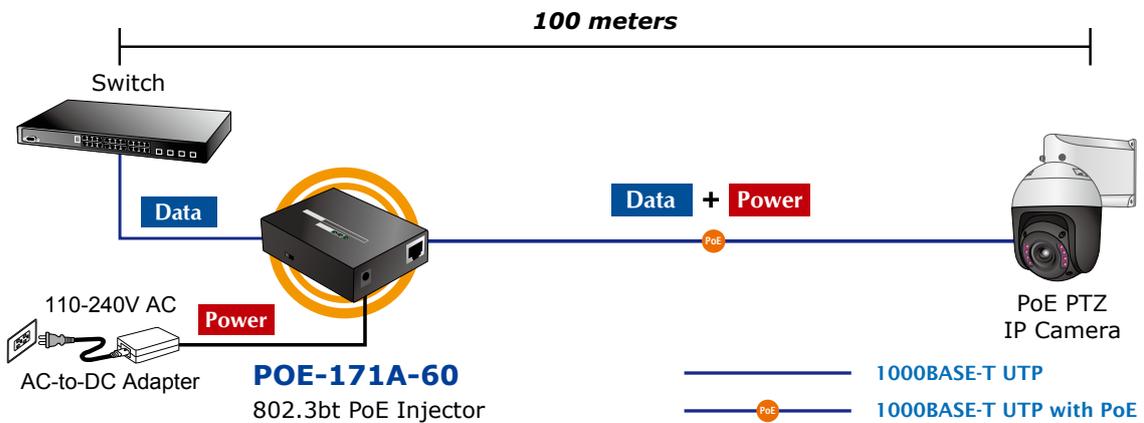


*Installation of 802.3bt PoE Injector and Splitter*

For a place which is hard to find the power inlet, the POE-171A-60 and POE-172S operate as a pair to provide the easiest way to power your Ethernet devices which need high power input, such as PTZ (Pan, Tilt & Zoom) network cameras, PTZ speed dome, color touch-screen Voice over IP (VoIP) telephones, and multi-channel wireless LAN access points installed on the top of the building or used in enterprise office or home.

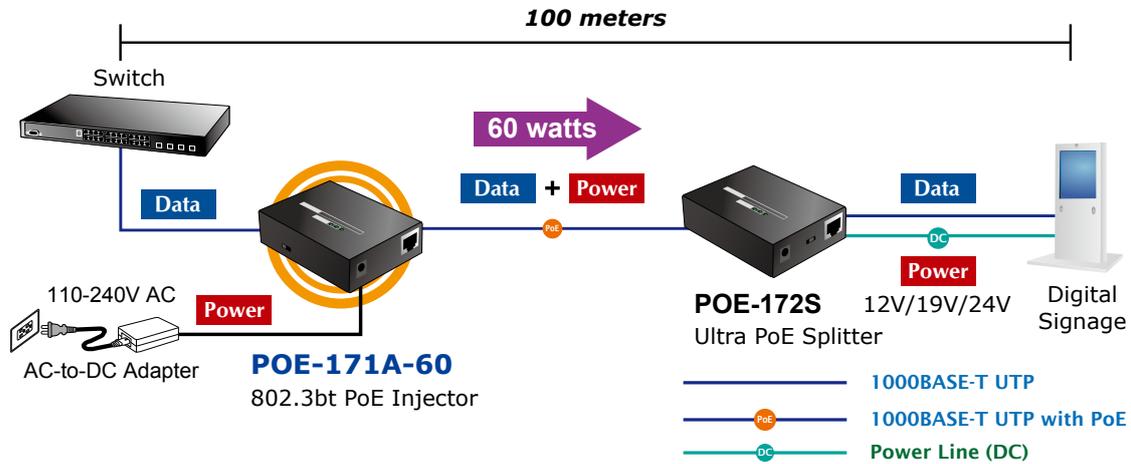

*Extended Installation of IEEE 802.3bt Injector and PoE Network*

Is 100-meter cable long enough for a wide range of IP surveillance deployments? The answer is certainly not. To achieve the benefits of IP surveillance and also the long-distance IP camera distribution, the POE-171A-60 and PLANET PoE Extender, POE-E304, can be a quick and cost-effective option. In the simplest application, the PoE Extender enables a PoE IP camera to be installed up to 200 meters away from the POE-171A-60. The POE-171A-60 delivers PoE power over the first 100 meters to the PoE Extender over UTP cables, and then the PoE Extender forwards the Ethernet data and remaining PoE power to the remote PoE IP cameras.

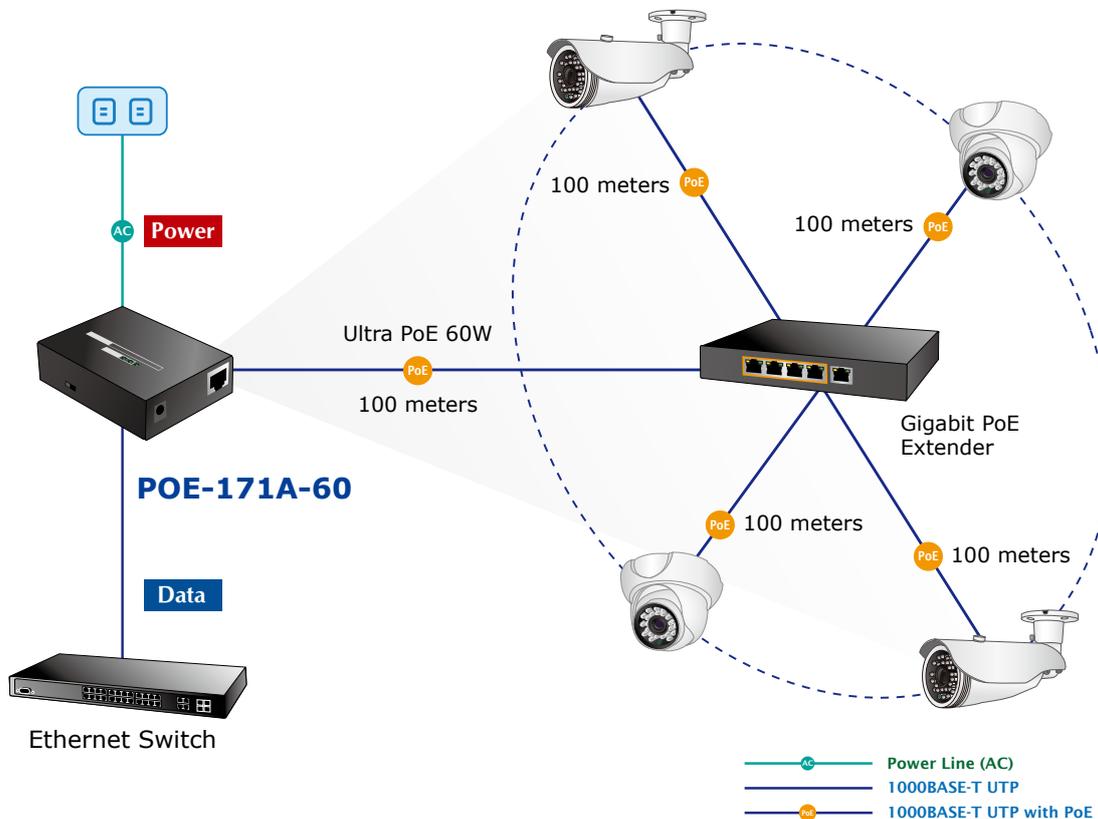

## Specifications

Product		POE-171A-60
Hardware Specifications		
Interface	Input Port	1 x RJ45 STP Data In
	Output Port	1 x RJ45 STP PoE (Data + Power) Out
	DC Socket	1 x 52~56V DC input socket
Network Cable		Twisted-pair cable up to 100 meters (328ft) 10BASE-T: 4-pair UTP Cat3, 4, 5, 5e, 6 100BASE-TX: 4-pair UTP Cat5, 5e, 6 1000BASE-T: 4-pair UTP Cat5e, 6
LED Indicator		System: Power x 1 (Green) PoE Port: PoE in-Use x 1 (Orange) Legacy mode: Legacy x 1 (Orange) PoE Usage: PoE Usage x 3 (Orange)
Data Rate		10/100/1000Mbps
Dimensions (W x D x H)		94 x 70.3 x 26.2 mm
Weight		200g
Unit Output Voltage		DC 54V
Power Requirements		External AC-to-DC adapter 100-240V AC, 50/60Hz, 1.5A
Power Consumption		72 watts max.
No. of devices that can be powered		1
Power over Ethernet		
PoE Standard		IEEE 802.3af/at/bt Ultra PoE PSE
PoE Power Output Budget		DC 54V / 60-watt PoE via 4-pair DC 54V / 30-watt PoE via 2-pair
PoE Power Supply Type		End-span + Mid-span
Power Pin Assignment		Pair 1 End-span: 1/2 (-), 3/6 (+) Pair 2 Mid-span: 4/5 (+), 7/8 (-)
Standards Conformance		
Standards Compliance		IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3bt 4-pair Power over Ethernet IEEE 802.3at Power over Ethernet Plus IEEE 802.3af Power over Ethernet
Regulatory Compliance		FCC Part 15 Class A, CE
Environment		
Operating Temperature		0 ~ 50 degrees C
Storage Temperature		-10 ~ 70 degrees C
Operating Humidity		5 ~ 90%, Relative Humidity, non-condensing
Storage Humidity		5 ~ 90%, Relative Humidity, non-condensing
Standard Accessories		
Package Contents		<ul style="list-style-type: none"> <li>• POE-171A-60</li> <li>• User's Manual</li> <li>• AC-to-DC power adaptor</li> <li>• AC power cord</li> </ul>

## Ordering Information

POE-171A-60	Single-Port 10/100/1000Mbps 802.3bt PoE Injector
-------------	--

## Related Products

POE-171	Single-Port 10/100/1000Mbps 60W Ultra PoE Injector
POE-172	Single-Port 10/100/1000Mbps Ultra PoE Injector (60 watts, internal PWR)
POE-173	60-watt Ultra Power over Ethernet Injector
POE-171S	60-watt Ultra Power over Ethernet Splitter with 12V/19V/24VDC output (10/100/1000Mbps)
POE-172S	Single-Port 10/100/1000Mbps Ultra PoE Splitter (12V/19V/24V)
IPOE-171S	Industrial Single-Port 10/100/1000Mbps Ultra PoE Splitter
POE-E304	1-Port Ultra PoE to 4-Port 802.3af/at Gigabit PoE Extender
IPOE-E172	Industrial 1-Port Ultra PoE to 2-Port 802.3bt/at Gigabit PoE Extender
IPOE-E174	1-port Ultra PoE to 4-port 802.3af/at Gigabit PoE Extender
ICA-E6265	2 Mega-pixel IR PoE Plus Speed Dome IP Camera with Extended Support

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,  
Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: [sales@planet.com.tw](mailto:sales@planet.com.tw)

Fax: 886-2-2219-9528

[www.planet.com.tw](http://www.planet.com.tw)



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2018 PLANET Technology Corp. All rights reserved.

**POE-171A-60**