

# Chassis Monitor

## Chassis Monitor



**23.1" (4:3)**


### Specifications

**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	R23L100-CHS1
Viewable Size Image	23.1"(4:3)
Active Display Area(mm)	470.4(H)x352.8(V)
Pixel Pitch(mm)	0.294(H) x 0.294(V)
Number of Pixels	1600x1200
Contrast Ratio	600:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m <sup>2</sup> )	500(typ.)
Viewing Angle(CR>=10)	-85~85(H); -85~85(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1600x1200@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	85W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	No

Remarks:R23L100 series= VGA Input only  
R23L110series= VGA+Video Input

### Mechanical Drawing

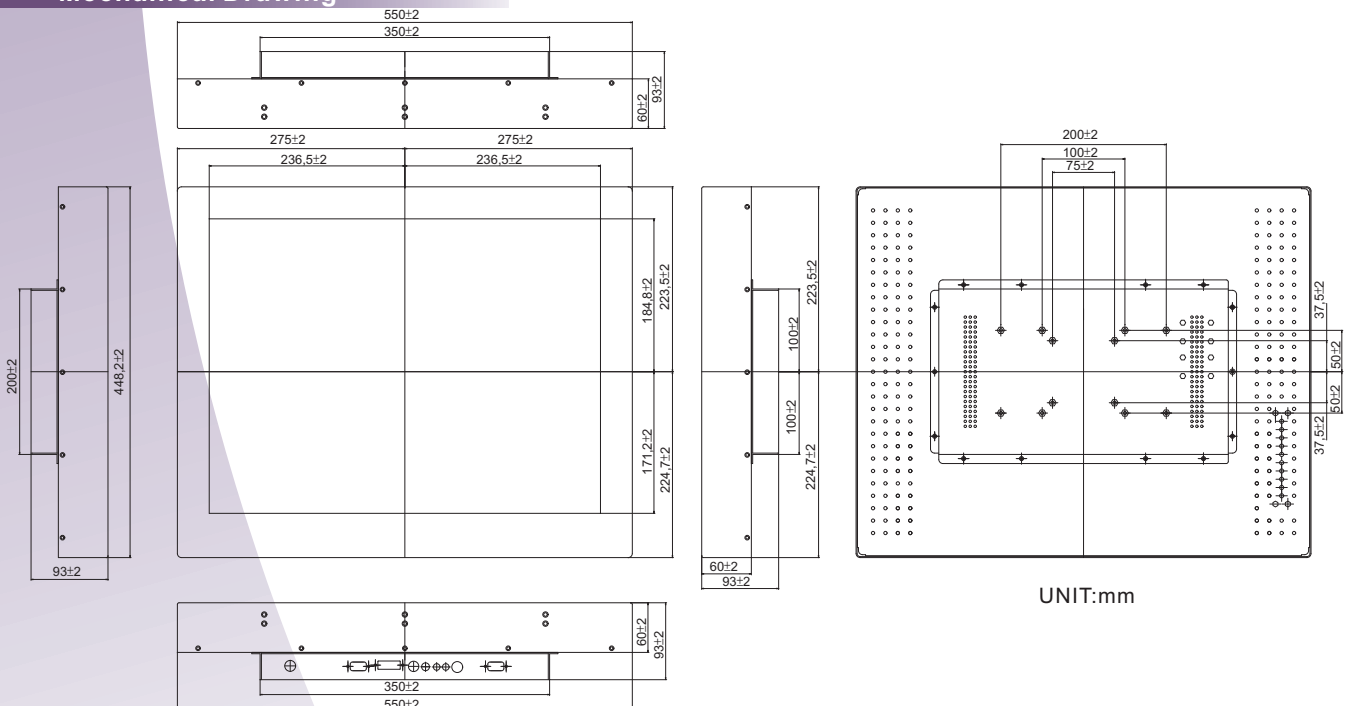

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.3	Pic change	Aug-16-13