

G-Win Slim IP65 Display




7"

Specifications



Model Name	W07L100-GSM1
Viewable Size Image	7" TFT
Active Display Area(mm)	153.6 (H) x 90 (V)
Display Resolution	1024 x 600
Pixel Pitch(mm)	0.15 (H) x 0.15 (V)
Recommended Resolution	1024 x 600 @60Hz
Contrast Ratio	700:1 (typ.)
Brightness(cd/m ²)	500cd/m ² (typ.)
Viewing Angle(CR>=10)	-75~75 (H); -70~75 (V)
Power Source	12V DC (M12 type)
Power Consumption	10 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	Yes
Input Ports	1 x VGA, 1 x USB for Touch
Speaker	1 x 1 Watt Speaker
Touch Screen	Projective Capacitive Touch(USB)
Operating Temperature	-10°C~55°C
Storage Temperature	-30°C~70°C
Operating Humidity	10%~95% (non-condensing)
IP Rating	Full IP65
Shock Operating	30g for 18ms, 300m/s ²
Vibration Operating	1.60/1.96/2.18 g rms for XYZ/ 5-500Hz
Certifications	MIL-STD-810F/G for vibration / shock, CE, FCC

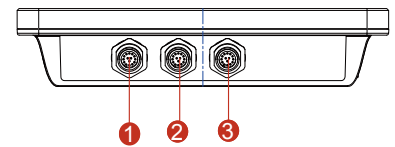

1. 12V DC (M12 type)
2. VGA (M12 type)
3. USB (M12 type)

Mechanical Drawing

