

Rugged Panel PC



Model: R15IH3S-VMA3(HB)

Product Features:


- » Intel® Core i5-4200U Haswell 1.6GHz (Turbo max 2.6GHz)
- » High Quality 15" Panel, 1024*768 resolution, 400 nits (Optional for 1000 nits)
- » Front IP65 Dust/ Water proof design with VESA mount
- » Aluminum Housing with Anti-Corrosion Treatments
- » Built-in ambient Light sensor
- » Wide Range 9 to 36V DC Input
- » Optional 6-60V DC Input, and Optional for Ignition On/Off delay
- » 5 Wire Resistive Touch / Anti-Reflective Protection Glass (Optional)
- » Optional GPS, 3G/WLAN(Either one). Digital IO/Canbus(Either one)
- » Compliance With EN50155

Product Specifications:

Display	Model Name	R15IH3S-VMA3(HB)
	Size	15"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2 M (8 bit) / 262K (6 bit)
	Brightness (cd/m ²)	400nits for R15IH3S-VMA3 Optional 1000nits for R15IH3S-VMA3HB (High Brightness)
	Contrast Ratio	700:1
	Viewing Angle	-80~80 (H) ; -70~70 (V)
	Active Area	304.1 (H) x 228.1 (V)
	Touch (optional)	5 Wire Resistive(Default)
	System	Processor
BIOS		AMI 16Mbit Flash
Memory		1xDDR3L 1600 MHz SO-DIMM default 2GB, Max. 8GB
Ethernet		2 x GbE LAN
Storage		mSATA SSD, default 64GB
Expansion Slot		1 x Mini PCIe slot (for wireless module)
		1 x Mini PCIe slot (for SATA SSD)
Input / Output		2 x USB 3.0
		1 x HDMI
		1 x RS-232
		1 x RS-232 (Optional)
		1 x RS-232/422/485
		1 x 9~36V Terminal Block
		1 x CanBus / Digital IO (Optional)
		1 x SIM Card Slot (Optional)
Environment	Operating Temperature	-25 ~ 55°C
	Storage Temperature	-30 ~ 70°C
	Humidity	10 ~ 95% non-condensing
	Shock	MIL810F/EN50155
	Vibration	MIL810F/EN50155
	Power Input	9~36V DC in (Phoenix type) Optional 6-60V DC in, with Ignition On/Off delay
	Safety	Compliance with EN50155, MIL-STD 810F
Driver OS Support	Windows Embedded 7 / Windows Embedded 8* <small>*For Windows Embedded 8, this panel pc supports the Metro UI, but does not support Snap View</small>	
Mechanical	Dimension(W x H x D)	398 x 308 x 58mm
	Approximate Weight	4.9 kg*
Packing List	(IH32) SBC Manual & Driver CD	
Product Optional Items	Mounting bracket	One robust bracket with locking handle (Can adjust from -5 deg. to 90 deg.)
	Sunlight Readable	Transflective film enhancement for optional
	Anti-reflective Glass	3 mm (Replace touch)
	WLAN / 3G	Either one
	GPS	USB interface, MTK chip
Digital IO / Canbus	Either one	
Security Support	Trusted Platform Module (TPM 1.2)	




I / O View:

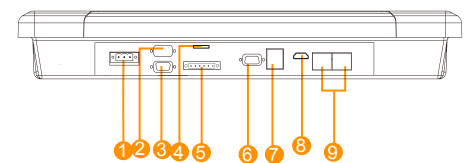

1. 9~36V Terminal Block
2. RS-232 (Optional)
3. RS-232
4. SIM Card Slot (Optional)
5. CanBus / DIO (Optional)
6. RS232/422/485
7. 2xUSB 3.0
8. HDMI
9. 2xRJ45

Front OSD Control Function:

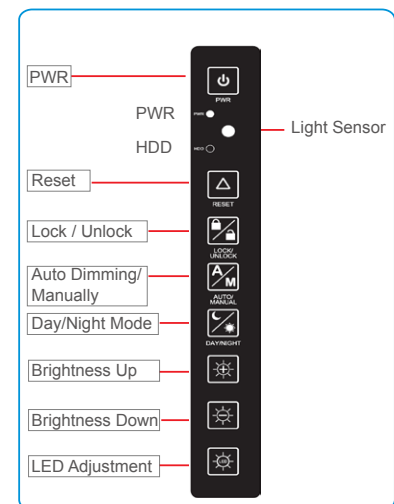

Drawing w / Mounting bracket:

