

# Full IP65 LCD


## USB Type-C Display

### 12.1" (4:3) Specifications



Model Name	R12L100-GSM2-C
Panel Size	12.1"
Active Display Area (mm)	245.76(H) x 184.32(V)
Resolution	1024x768
Brightness (cd/m <sup>2</sup> )	500 (Typical)
Contrast Ratio	700:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-80~80(H) ; -70~70(V)
Display Colors	16.2M
Standard Input Signal	1 x IP67 USB Type-C connector
Touch Screen	Projected Capacitive Touch (USB) Protection Glass (Optional)
Speakers (Optional)*	2 x Speaker
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	12W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
IP Rating	Full IP65
Certifications	CE, FCC

\*Note: If your order does not include the Audio/Speakers option, the digital input will not have voice.

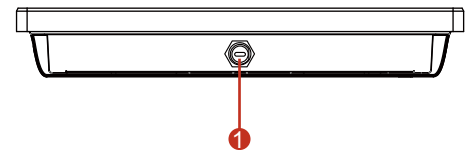

1. USB Type-C Connector
2. OSD Button

### Mechanical Drawing

