

# Stand Alone IP65 LCD


## USB Type-C Display

15" (4:3)

### Specifications



Model Name	R15L600-GCC3-C
Panel Size	15"
Active Display Area (mm)	304.1 (H) x 228.1 (V)
Resolution	1024x768
Brightness	250 (Typical) nits
Contrast Ratio	2000:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-88~88 (H) ; -88~88 (V)
Display Colors	16.2M (6 bits/color)
Standard Input Signal	1 x USB Type-C connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	2 x Speaker (Optional)
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode (5V/3A)
Power Consumption	12W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
IP Rating	Front IP65
Certifications	CE, FCC

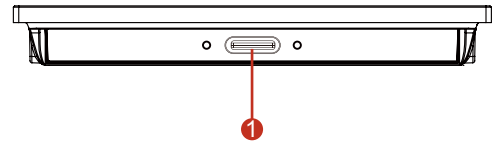

1. USB Type-C Connector
2. OSD Button

### Mechanical Drawing

