

Full IP65 LCD

USB Type-C Display


15" (4:3)

Specifications



Model Name	R15L600-GSC3-C
Panel Size	15"
Active Display Area (mm)	304.1 (H) x 228.1 (V)
Resolution	1024x768
Brightness (cd/m ²)	250 (Typical)
Contrast Ratio	2000:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-88~88 (H) ; -88~88 (V)
Display Colors	16.2M (6 bits/color)
Standard Input Signal	1 x IP67 USB Type-C connector
Touch Screen	Projected Capacitive Touch (USB) Protection Glass (Optional)
Speakers (Optional)*	2 x Speaker
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	12W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
IP Rating	Full IP65
Certifications	CE, FCC

*Note: If your order does not include the Audio/Speakers option, the digital input will not have voice.

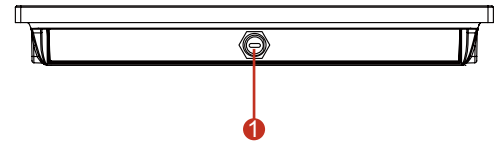

1. USB Type-C Connector
2. OSD Button

Mechanical Drawing

