Panel Mount LCD

17"

RoHS COMPLIANT 2002/95/EC

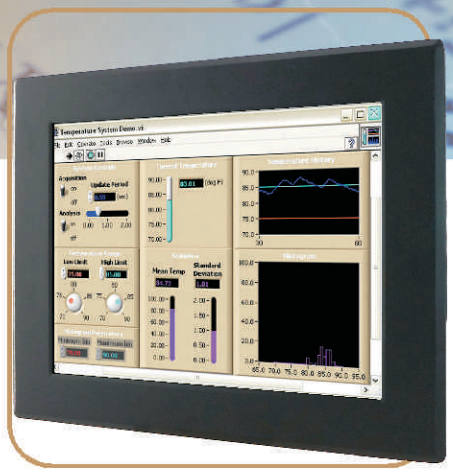

Specifications

Model Name	S17L500-PMM1
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280 x 1024
Contrast Ratio	1000:1(typ.)
Display Color	16.7M
Brightness(cd/m²)	350(typ.)
Viewing Angle(CR>=10)	-85~85(H);-80~80(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	36W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive,Capacitive,SAW

Remarks:S17L500 series= VGA input only
S17L540 series= VGA+Video Input

*It supports NTSC/PAL video sources through a composite Video or S-Video connector

Mechanical Drawing

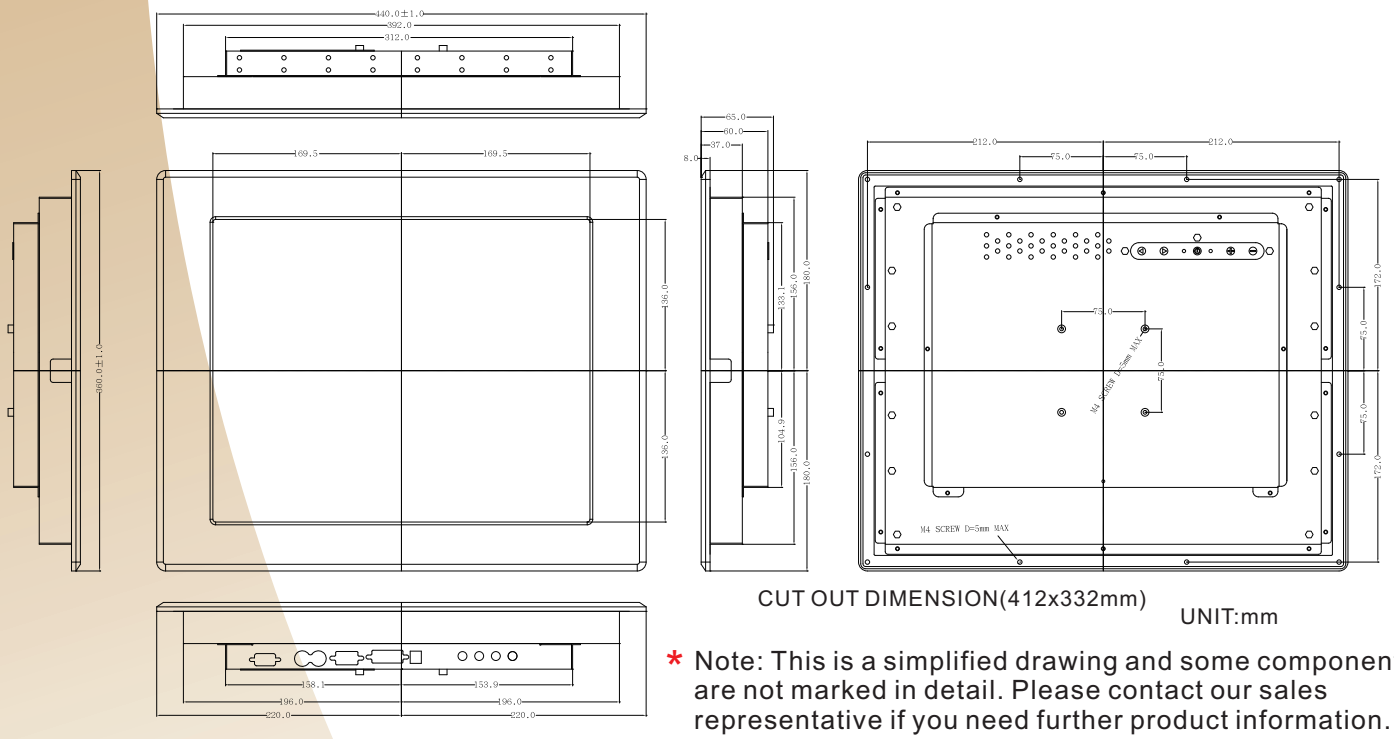

CUT OUT DIMENSION(412x332mm)

UNIT:mm

* Note: This is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.1	Spec Change	Apr-24-13
1.2	Spec Change	Jun-11-13
1.3	Spec Change	Nov-26-13