

# Stand Alone LCD


## USB Type-C Display

7" (16:9)

### Specifications

RoHS  
COMPLIANT  
2011/65/EU


Model Name	W07L100-PCT1-C
Panel Size	7"
Active Display Area (mm)	153.6(H) x 90(V)
Resolution	1024 x 600
Contrast Ratio	1000:1 (Typical)
Display Colors	16.7M
Brightness	320 nits (Typical)
Viewing Angle (CR>=10)	-70~75(H) ; -75~75 (V)
Standard Input Signal	USB Type-C Connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	1 x 1W Speaker
OSD	5 Keys OSD Speaker
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	6W typical , Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60 °C
Accessories	1 x USB Type-C cable(Optional)
Certifications	CE, FCC

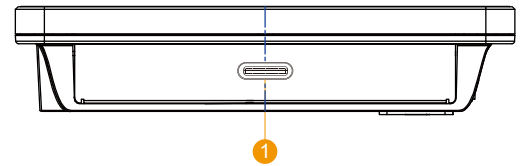

1. USB Type-C Connector
2. OSD Button

\*Outside dimension and I/O will be different from standard.

### Mechanical Drawing (without touch)

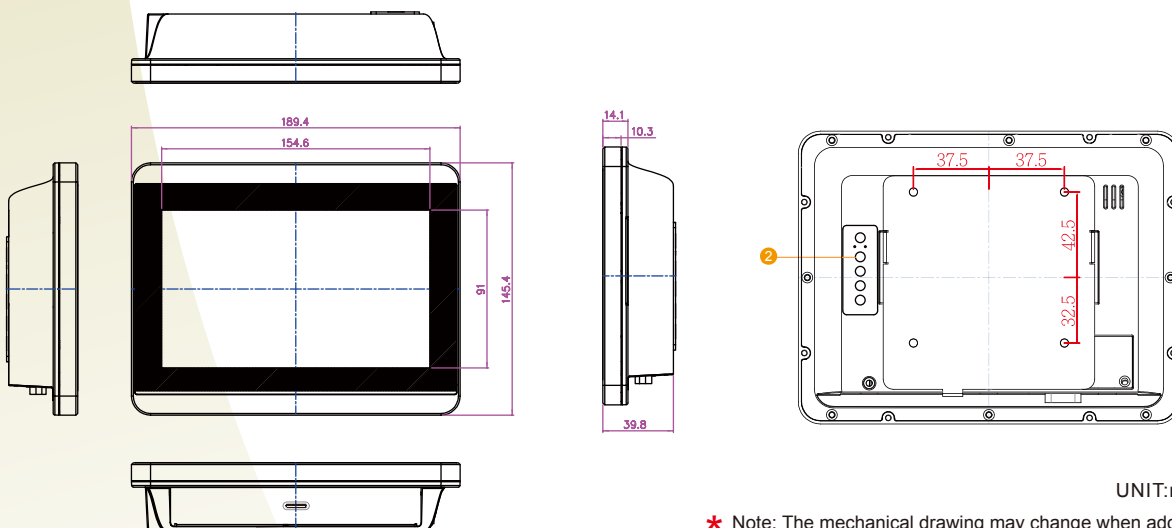

UNIT:mm

\* Note: The mechanical drawing may change when adding touch screen.  
Please contact our sales representative if you need further product information.