

## G-Win Slim IP65 Display




### 10.1"

#### Specifications



Model Name	W10L100-GSH1(HB)
Viewable Size Image	10.1" TFT (Widescreen)
Active Display Area(mm)	220.416 (H) x 129.15 (V)
Display Resolution	1024x600
Pixel Pitch(mm)	0.21525 (H) x 0.21525 (V)
Recommended Resolution	1024 x 600
Contrast Ratio	500:1 (typ.)
Brightness(cd/m <sup>2</sup> )	200 cd/m <sup>2</sup> (typ.) Optional High Brightness for 800 cd/m <sup>2</sup> (typ.)
Viewing Angle(CR>=10)	-70~70 (H); -60~50 (V)
Power Source	9~36V DC (M12 type)
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	Yes
Input Ports	1 x VGA, 1 x USB for Touch
Speaker	1 x 1 Watt Speaker
Touch Screen	Projective Capacitive Touch(USB) with optional protection glass
Operating Temperature	-10°C~55°C
Storage Temperature	-30°C~70°C
Operating Humidity	10%~95% (non-condensing)
IP Rating	Full IP65
Shock Operating	30g for 18ms, 300m/s <sup>2</sup>
Vibration Operating	1.60/1.96/2.18 g rms for XYZ/ 5-500Hz
Certifications	MIL-STD-810F/G for vibration / shock, CE, FCC

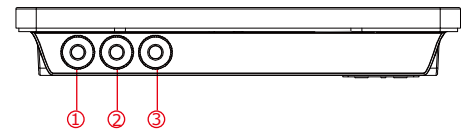

1. 9~36V DC (M12 type)
2. VGA (M12 type)
3. USB For Touch(M12 type), only with Touch

#### Mechanical Drawing

