

# Chassis LCD

## Chassis LCD

### 12.1" (16:10)


#### Specifications

**RoHS**  
COMPLIANT  
2002/95/EC


Model Name	W12L100-CHM9
Viewable Size Image	12.1"(16:10)
Active Display Area(mm)	261.12(H)x163.2(V)
Pixel Pitch(mm)	0.204(H) x 0.204(V)
Number of Pixels	1280x800
Contrast Ratio	1000:1(typ.)
Display Color	262k/16.2M
Brightness(cd/m )	400(typ.)
Viewing Angle(CR>=10)	-88~88(H);-88~88(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1280x800@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	4 W Resistive

Remarks:W12L100series= VGA Input only

W12L110series= VGA+Video Input

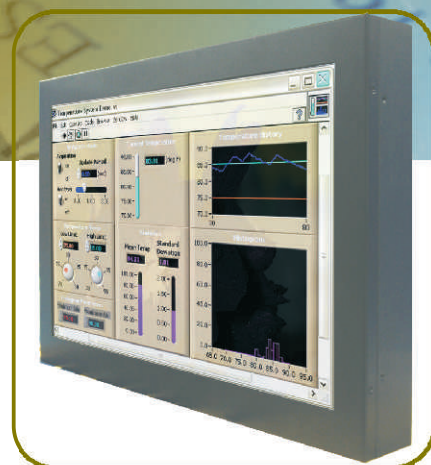

#### Mechanical Drawing

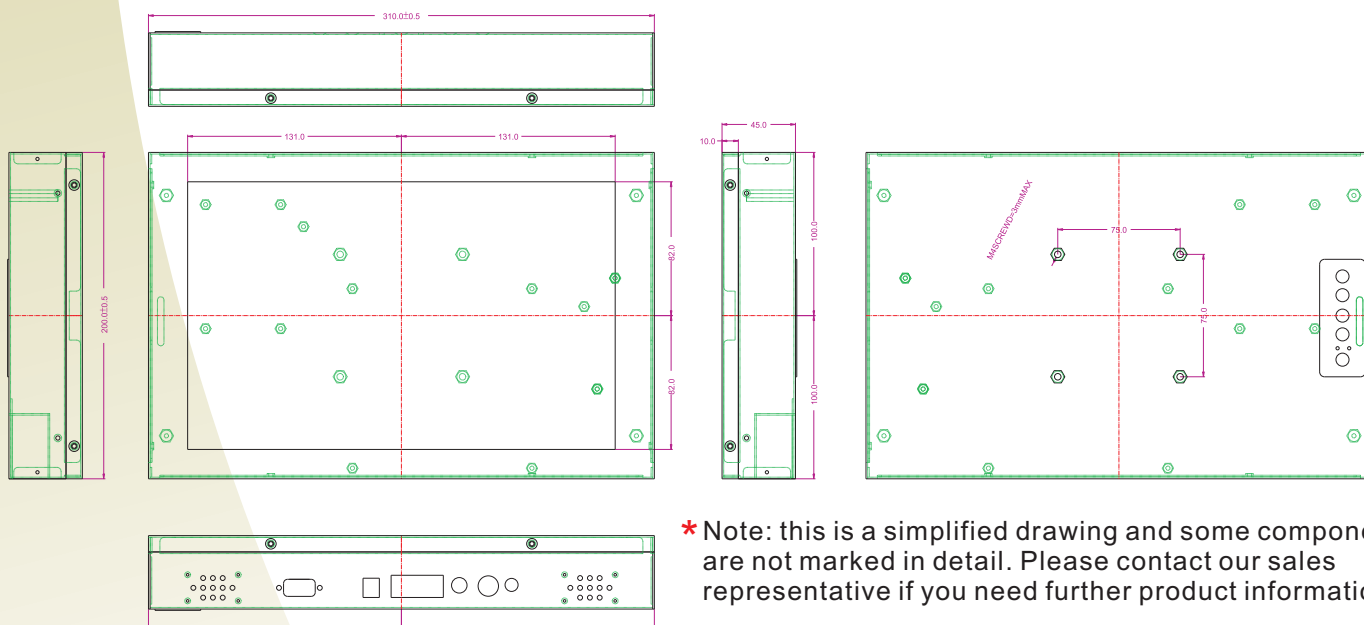

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First Release	Jan-10-13
1.1	Change drawing	May-08-13
1.2	Pic Change	Aug-09-13