Open Frame LCD

Open Frame LCD

22"(16:10)

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	W22L100-OFM1(Standard)/ W22L100-OFM1-S(with SAW Touch)
Viewable Size Image	22"(16:10)
Active Display Area(mm)	473.76(H)x296.1(V)
Pixel Pitch(mm)	0.282X0.282
Number of Pixels	1680x1050
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bit/color)
Brightness(cd/m^2)	250
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1680x1050@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive / SAW(need special housing)

Remarks:W22L100 series= VGA input only
W22L110 series= VGA+Video Input

Mechanical Drawing: W22L100-OFM1 (With Resistive)

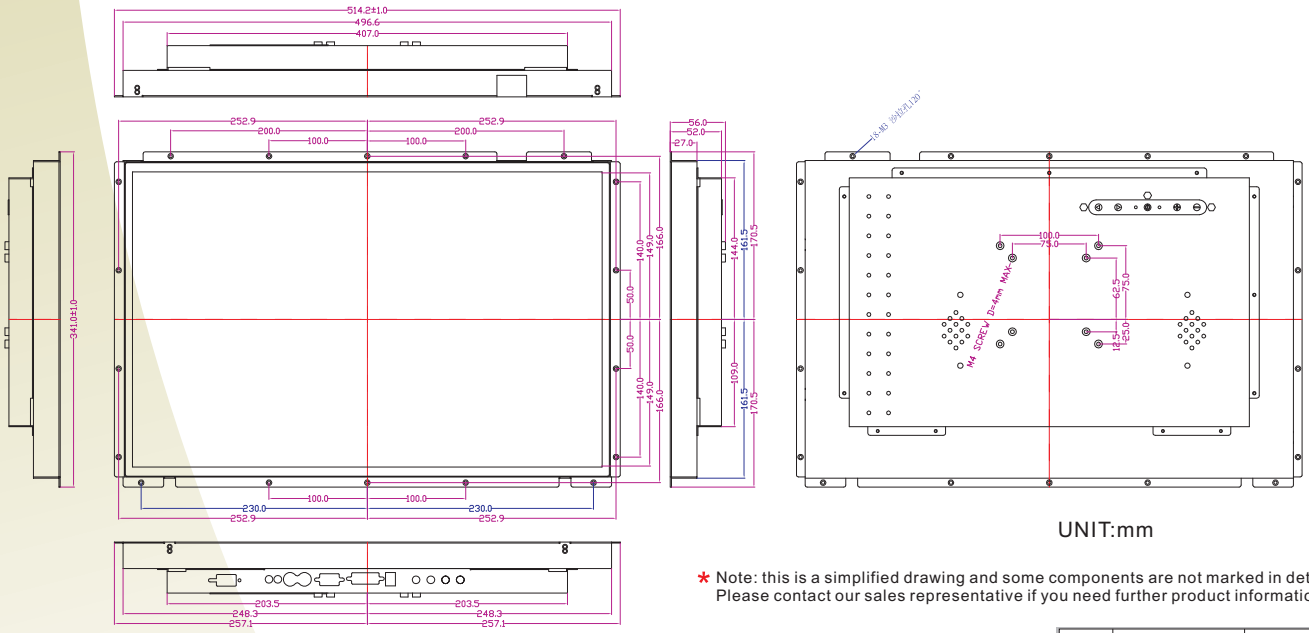

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.5	Spec change	Apr-22-14

Open Frame LCD

Mechanical Drawing: W22L100-OFM1-S(With SAW)

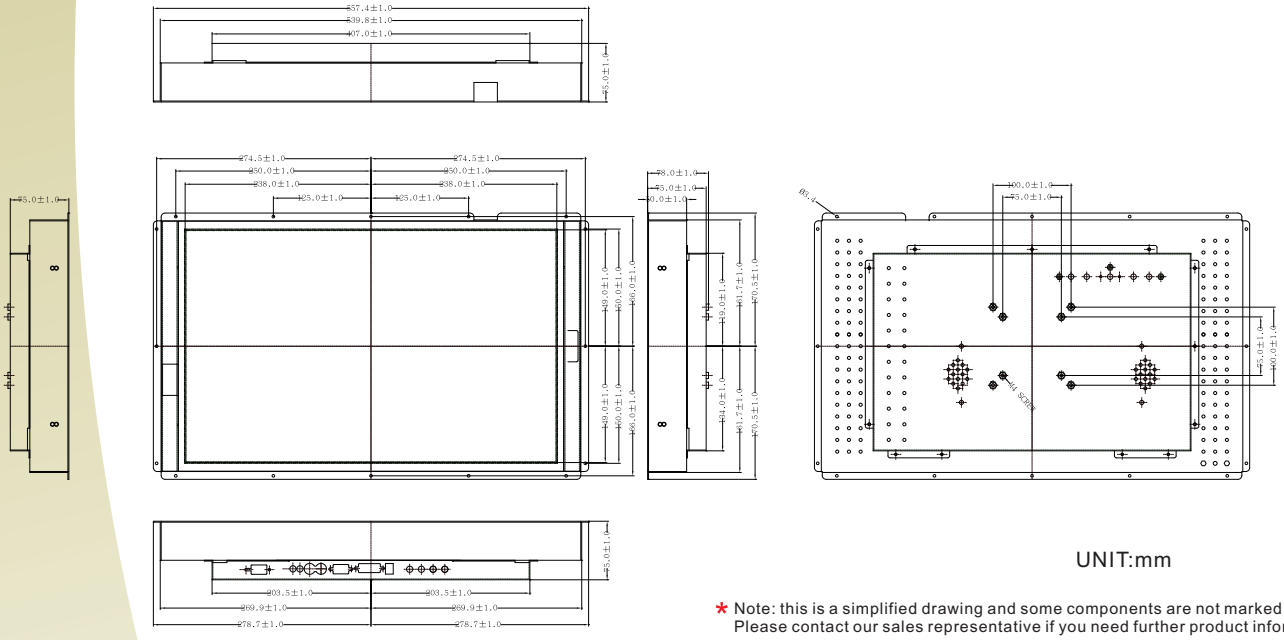

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.