

# Open Frame

## Open Frame LCD



24"(16:9)

### Specifications


**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	W24L100-OFA1
Viewable Size Image	24"(16:9)
Active Display Area(mm)	531.36(H)x298.89(V)
Pixel Pitch(mm)	0.27675(H)x0.27675(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m <sup>2</sup> )	250
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	12VDC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	40W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, SAW

Remarks:W24L100series= VGA Input only

W24L110 series= VGA+Video Input

### Mechanical Drawing

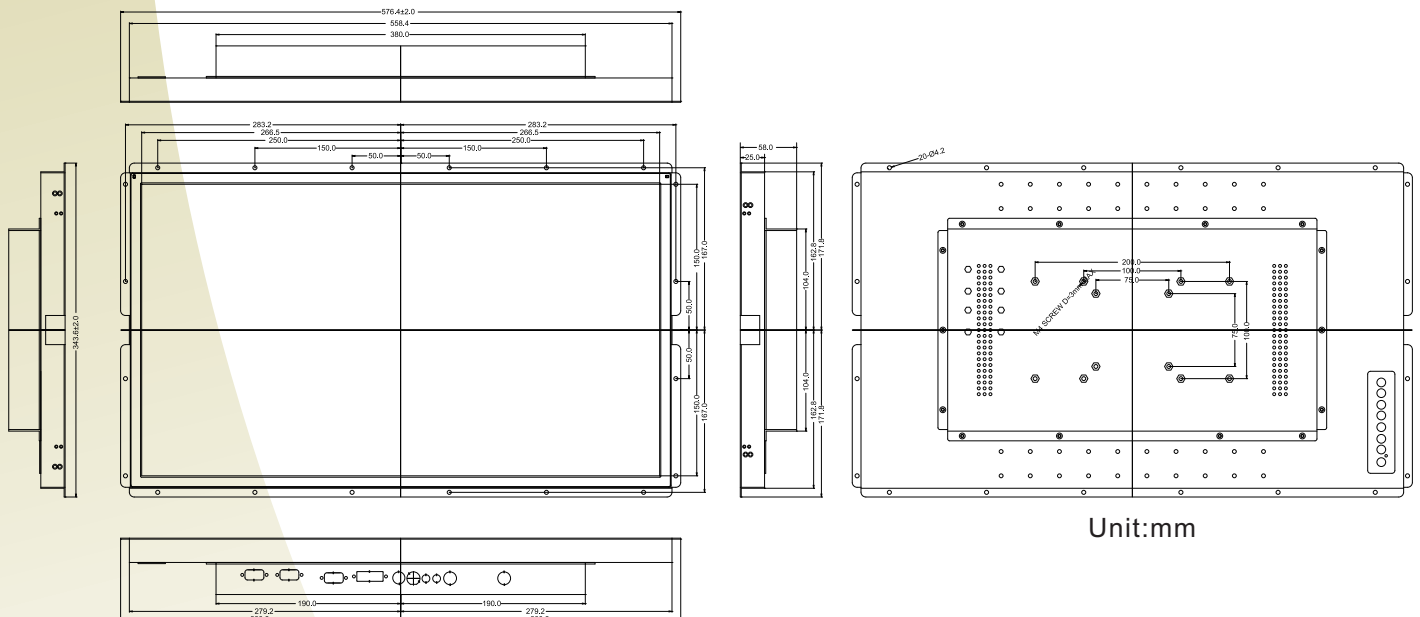


\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

# Open Frame

## Open Frame LCD

### Mechanical Drawing with SAW Touch

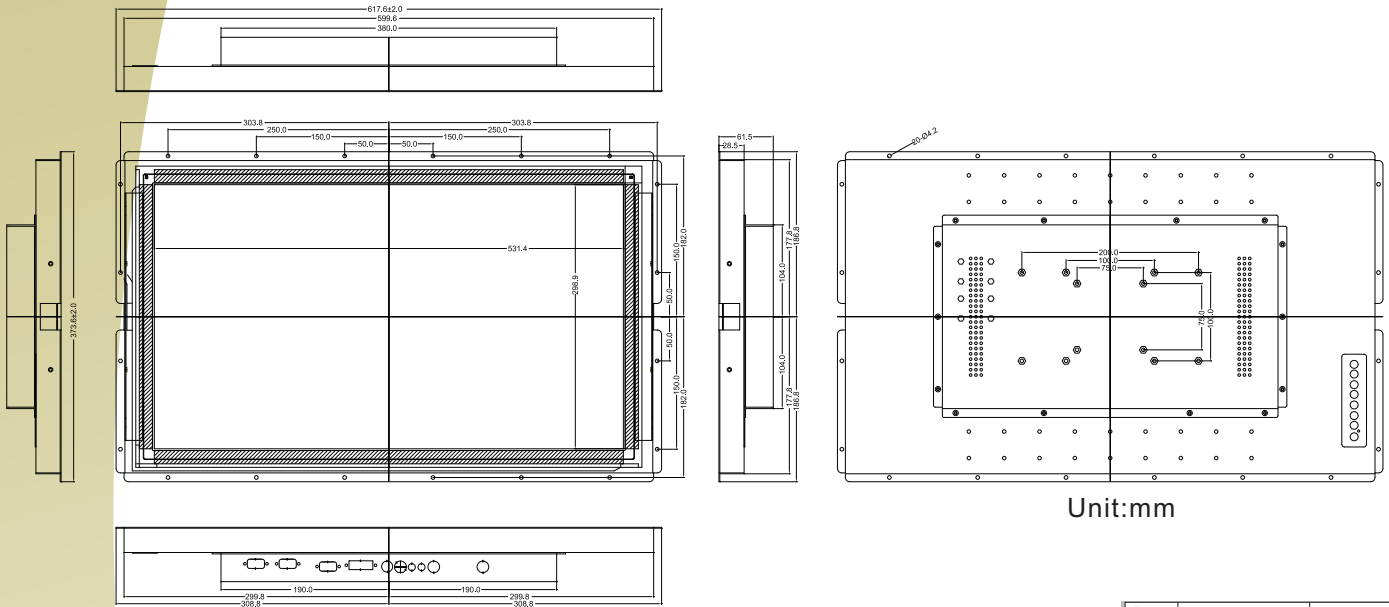

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.4	Drawing change	Jul-22-13
1.5	Spec change	Dec-09-13
1.6	Add drawing	Dec-16-13