

Panel Mount LCD

Panel Mount LCD



24"(16:9)

Specifications




Model Name	W24L100-PMA1
Viewable Size Image	24"(16:9)
Active Display Area(mm)	531.36(H)x298.89(V)
Pixel Pitch(mm)	0.27675(H)x0.27675(V)
Number of Pixels	1920 x 1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	250
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	31.5~80.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	40W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks:W24L100series= VGA Input only
W24L110 series= VGA+Video Input

Mechanical Drawing

10 mm front bezel without Touch or Glass

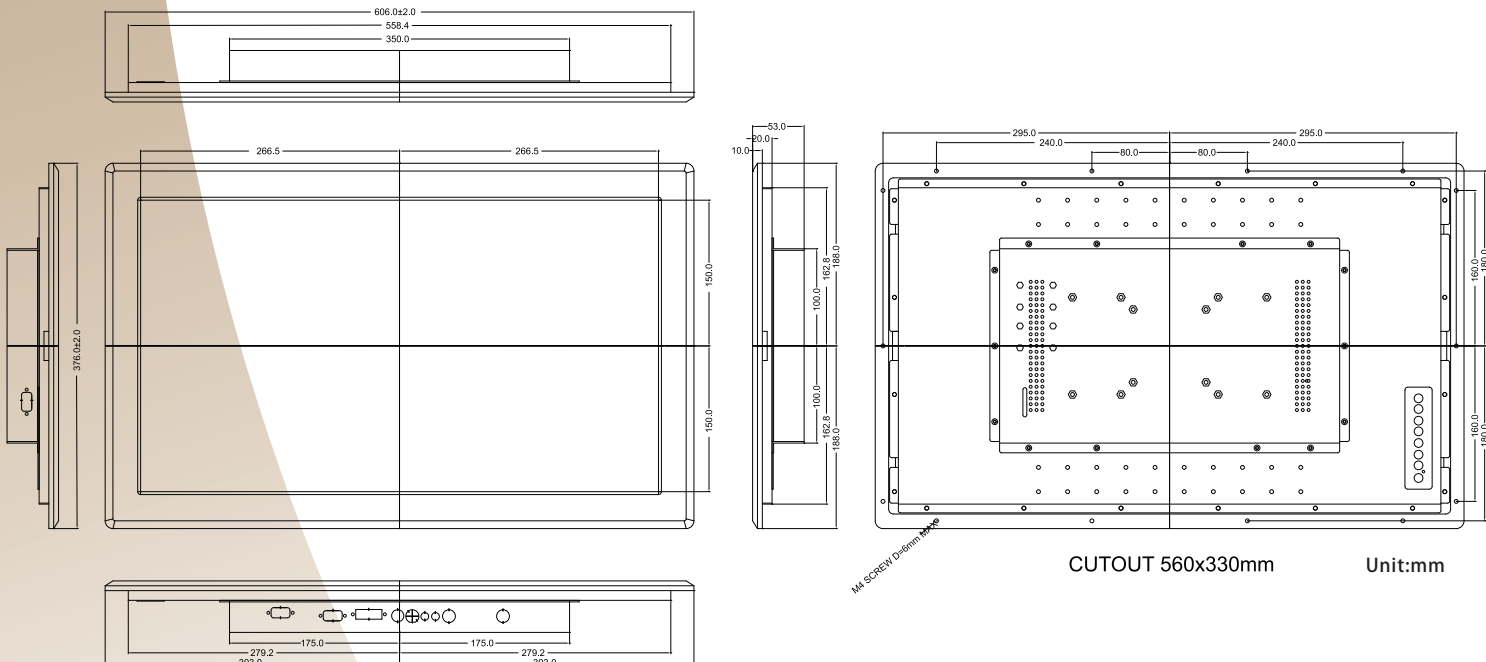


Panel Mount LCD

Panel Mount LCD

Mechanical Drawing

10 mm front bezel with Touch or Glass

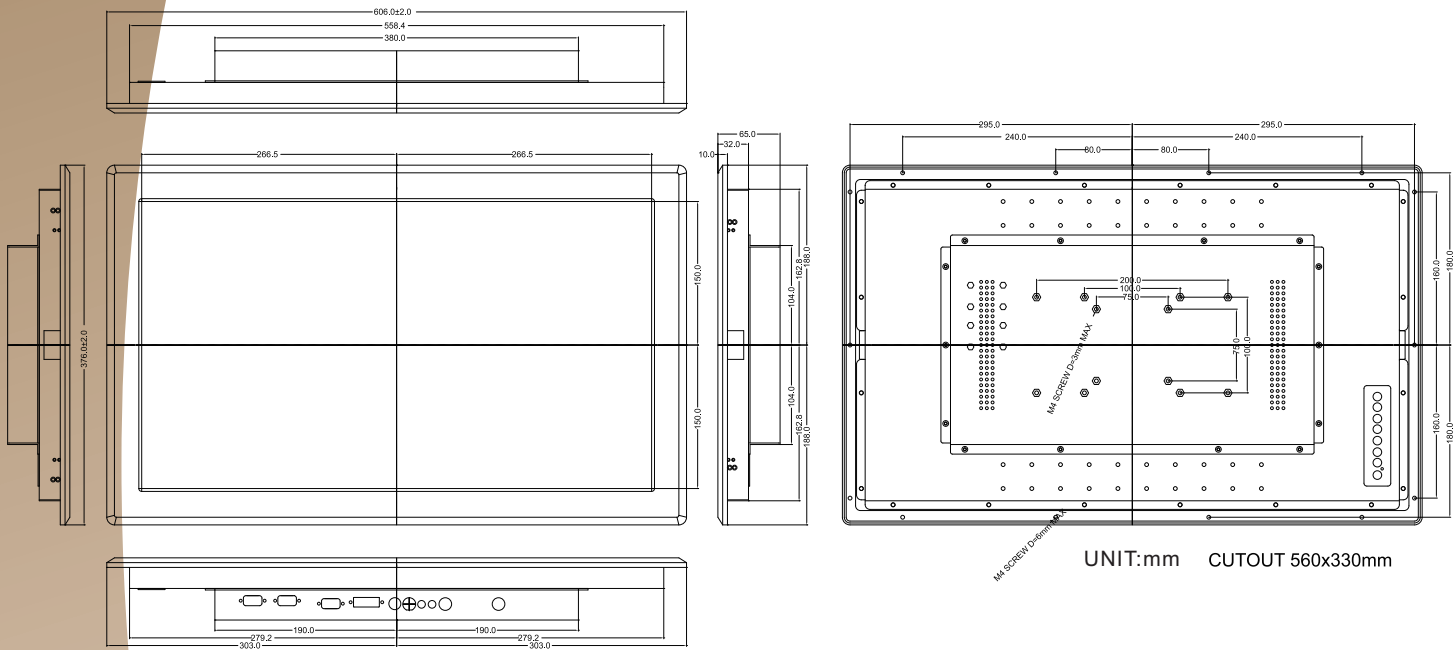

Rev.	Reasons	Revised Date
1.4	Drawing change	Dec-09-13
1.5	Spec change	Dec-10-13
1.6	Add Drawing	Jan-02-14