

# W15IAD3S-PPA4

## 15.6" Intel® Core™ i5-1235U PP Series HMI Panel PC



### KEY FEATURES

- 15.6" 1366 x 768 Resolution with Projective Capacitive multi-touch screen
- 12th Gen Intel® Core™ i5-1235U processor
- 1 x SODIMM, DDR5 4800MHz, support up to 32GB
- Integrated Dual 2.5 Gigabit Ethernet
- Multiple I/Os, 2 x USB 3.2 Gen2x1, 2 x Serial Ports
- Front IP65 water and dust proof
- Aluminum housing and fanless design
- 12 V DC Power input



### SPECIFICATIONS

Display			
Resolution	1920x1080	Size	15.6 inches
Contrast Ratio	800:1	Panel Brightness	300.0 nits
View Angles	85,85,85,85	Active Area	344.16x193.59 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		
System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz)	Memory	1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Mechanical			
Dimension	415 x 275 x 71 mm	Weight	3.9 kg
Mounting	Panel mount VESA Mount	Enclosure	Metal Housing
Cooling System	Fanless design	Cut out	374.5 x 240 mm
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C	IP rating	Front IP65
Certification			
Certification	CE, FCC		
IO Ports			

<b>Power Input</b>	1 x 12V DC, 2.5φ DC jack	<b>USB Port</b>	2 x USB3.2 Gen2x1 (Type-A)
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232) 1 x RS232	<b>Video</b>	1 x HDMI 2.0 (Optional)
<b>Audio</b>	2 x Speaker	<b>Expansion Port</b>	1 x M.2 2280 M-Key Slot (for NVME SSD) 1 x M.2 2230 E-KeySlot (for Wi-Fi Module)
<b>LAN</b>	2 x Giga LAN RJ45 Connector	<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>Brightness Knob</b>	1 x Brightness Adjustment Knob		

**Control**

<b>Button</b>	1 x Power Button 1 x Reset Button
---------------	--------------------------------------


**Accessory**

<b>Accessory</b>	100~240V AC to DC Adapter Power Cord VESA screws Mounting clips
------------------	--

**Power**

<b>Power Rating</b>	12V DC	<b>Adapter</b>	12V 120W
---------------------	--------	----------------	----------

**DIMENSIONS** UNIT:MM

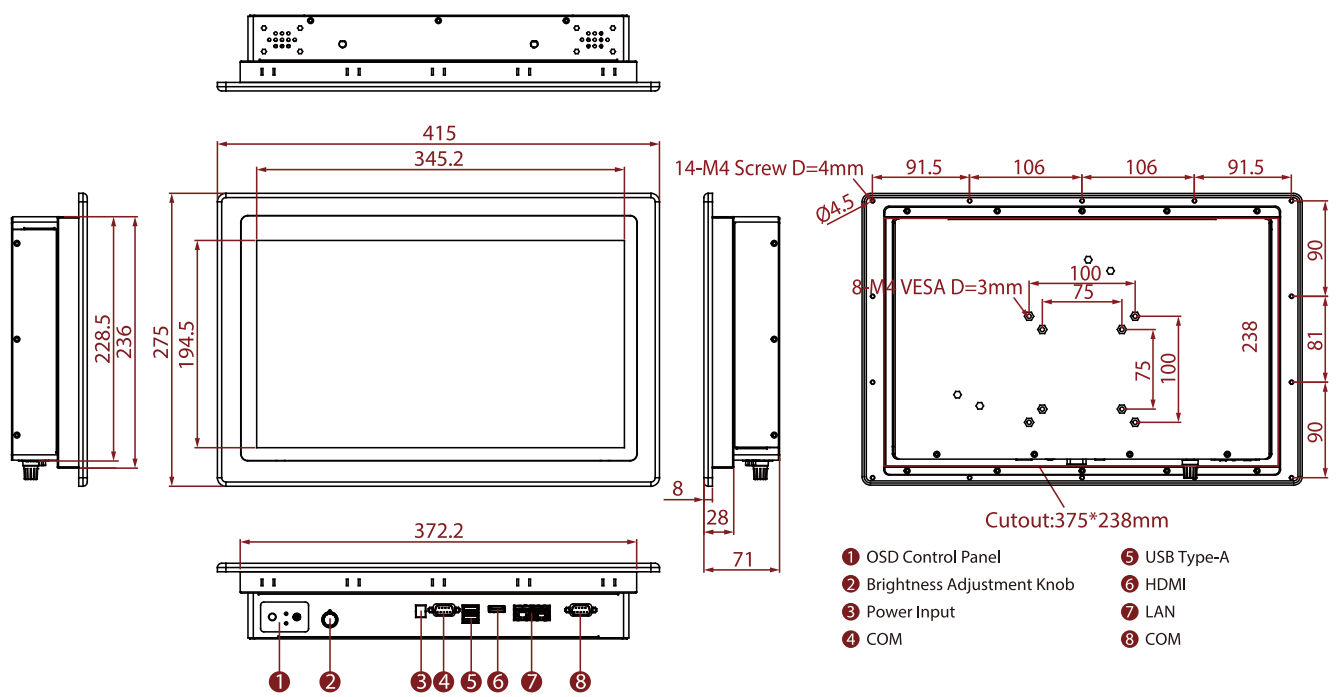

**NOTE**

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.