


Datasheet V 1.0  
**TPK-DTM.21P0UE7000**

**21.5 inches P-CAP Touch Screen Monitor IEM-22**

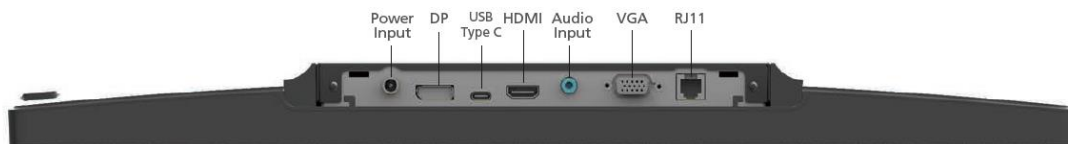

## Technical specification:

Size	21.5" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	1000:1
Brightness	250 nits (No Touch), 225 nits (P-CAP)
View Angle	H:178°, V:178°
<b>Touch LCD Display</b>	
Touch Type	Projected Capacitive
Touch points	10 points Touch
Touch Screen Interface	USB-HID
Display Surface	7H Hardness durable glass
<b>I/O Port</b>	
RJ-11	1 x RJ11 (for Remote Key)
USB Port	1 x USB Type C (Alt Mode for DP video support)
Video Port	1 x VGA, 1 x DP, 1 x HDMI (up to 1920 x 1080 @60Hz)
Audio Port	1 x Audio-Input (3.5 mm Mini-Jack)
Power Input	1 x DC In 12V Jack Power Input
<b>Physical Properties</b>	
Speaker	2 x 2W Stereo
Power Supply	50W (12VDC/4.16A) External AC Power Adaptor (100VAC ~240VAC, 50/60Hz)
Material	Plastic, Glass, SECC Metal, Black
Dimensions (W x H x D) mm	510.96 x 308.01 x 37.90 mm
Net Weight (kg) / Gross Weight (kg)	4.04 kg / 6.40 kg
Carton (W x H x D) mm	610 x 405 x 160 mm
VESA	100 x 100 mm
<b>Safety</b>	
Certifications	CE, FCC, LVD, RoHS
<b>Environment</b>	
Operating Temperature / Operating Humidity	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature / Storage Humidity	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
<b>Ordering information</b>	
Part-Nr. w/o stand	TPK-DTM.21P0UE7000
Part-Nr, with Flex-Stand	TPK-DTM.21P0UE7005

## Mechanical drawing

