

## Chassis Monitor



### 22" (16:10)


#### Specifications



Model Name	W22L100-CHM1
Viewable Size Image	22"(16:10)
Active Display Area(mm)	473.76(H)x296.1(V)
Pixel Pitch(mm)	0.282(H)x0.282(V)
Number of Pixels	1680x1050
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bit/color)
Brightness(cd/m <sup>2</sup> )	300(typ.)
Viewing Angle(CR>=10)	-80~80(H); -80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1680x1050@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	40W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, SAW

Remarks: W22L100 series= VGA input only  
W22L110 series= VGA+Video Input

#### Mechanical Drawing

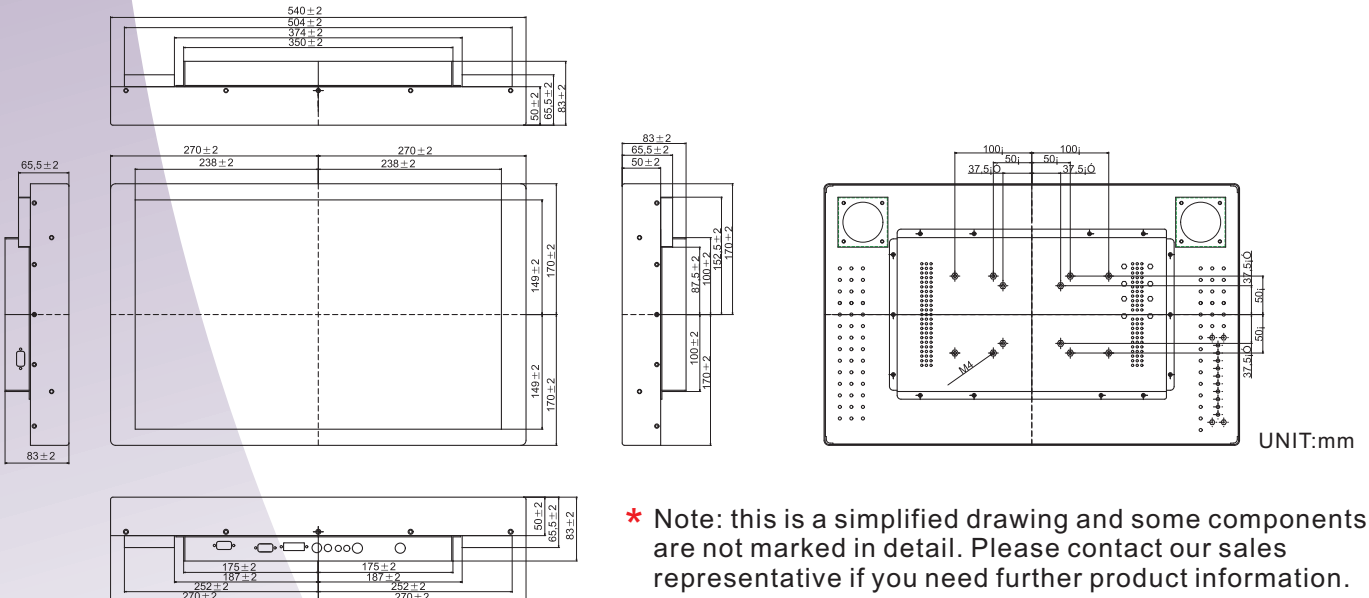

Rev.	Reasons	Revised Date
1.0	First release	Oct-13-09
1.1	Spec change	Nov-13-12
1.2	Change Pic	June-07-13